

90° HYBRID COUPLER



SYNSTRI[®] MODEL: MSQ1628G

WIDE BANDWIDTH

1600 - 2800 MHz

FEATURES:

- ▶ Synstrip Technology™
- ▶ Small Package Size, Surface Mount
- ▶ REL-PRO® Patented Technology
- ▶ Building Block For:
 - Power Amplifiers
 - Image Rejection Mixers
 - I & Q / SSB Modulators
 - Phase Shifters & More...

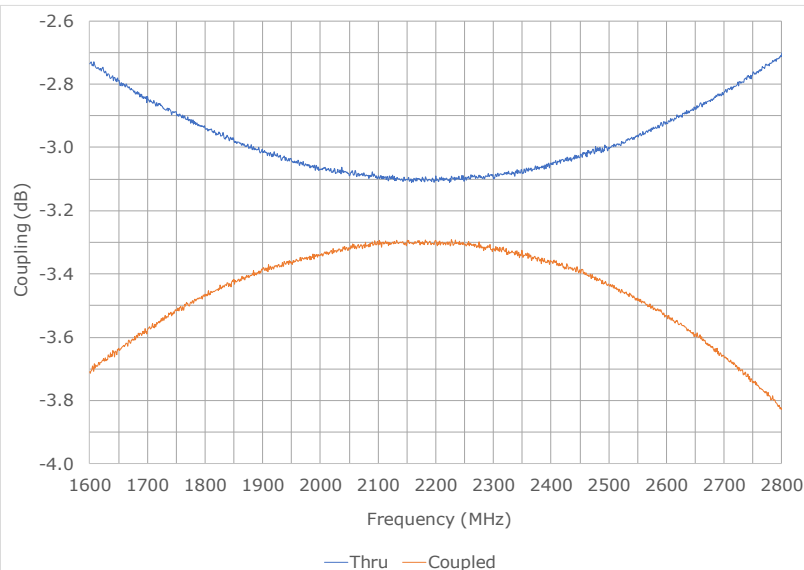

SPECIFICATIONS (Rev. A 07/14/26)

Frequency	1600 - 2800 MHz		
Insertion Loss (dB) *	Frequency (MHz)	Typ.	Max.
	1600 - 2800	0.28	0.50
	1850 - 2500	0.22	0.35
Amplitude Unbalance (dB)	Frequency (MHz)	Typ.	Min.
	1600 - 2800	1.1	1.5
	1850 - 2500	0.45	0.80
Phase Unbalance (Deg.)	Frequency (MHz)	Typ.	Min.
	1600 - 2800	1.1	3
	1850 - 2500	1.0	3

Isolation (dB)	Frequency (MHz)	Typ.	Min.
	1600 - 2800	20	16
	1850 - 2500	20	16
Power Rating	100 Watts Avg. (CW)		
Impedance	50 Ohms (Nom.)		
VSWR	Frequency (MHz)	Max.	
	1600 - 2800	1.4:1	
	1850 - 2500	1.4:1	
Operating Temperature Range	-55 to +85 °C		
* Is the average of the two coupling signals in excess of the 3 dB theoretical signal splitting			


90° HYBRID COUPLER

SYNSTRIIP® MODEL: MSQ1628G

WIDE BANDWIDTH

1600 - 2800 MHz


Package # 493

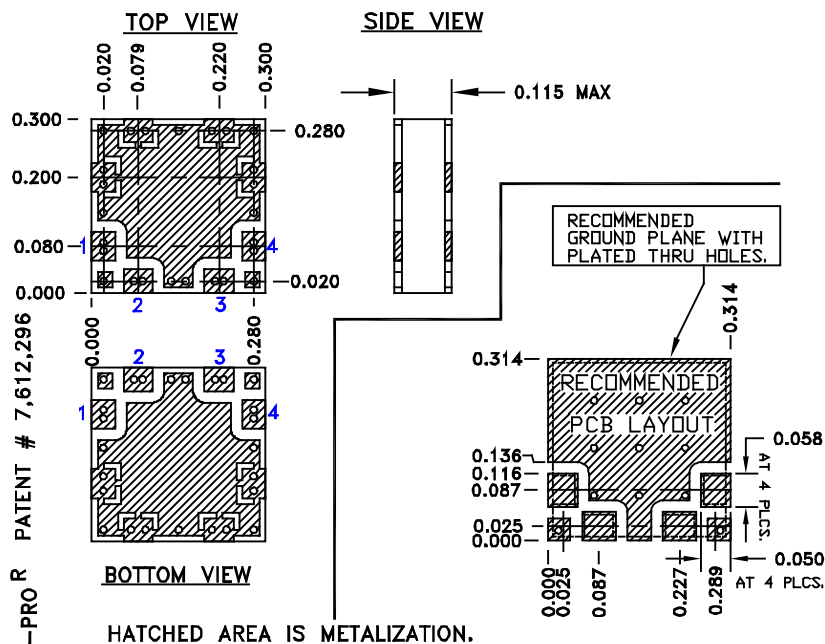

IMPORTANT NOTES:

- 1) THE WIDTH OF THE SIGNAL PADS CORRESPOND TO 50 OHMS. THE DIELECTRIC CONSTANT FOR THE SIGNAL PAD DIMENSIONS SHOWN IS 3.48 AND BOARD THICKNESS OF 0.032".
- 2) THE COUPLER SHOULD BE SOLDER ATTACHED TO THE RECOMMENDED PC BOARD LAYOUT FOR ACHIEVING SPECIFIED PERFORMANCE.

PACKAGE MOUNTING: SEE APPLICATION NOTE AN7200

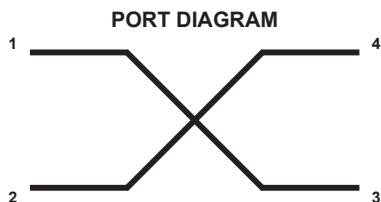

PHASING DIAGRAM

OUT IN	1	2	3	4
1	X	90°	0°	ISO
2	90°	X	ISO	0°
3	0°	ISO	X	90°
4	ISO	0°	90°	X



90° HYBRID COUPLER

SYNSTRIIP® MODEL: MSQ1628G

WIDE BANDWIDTH

1600 - 2800 MHz

Data @ 25°C

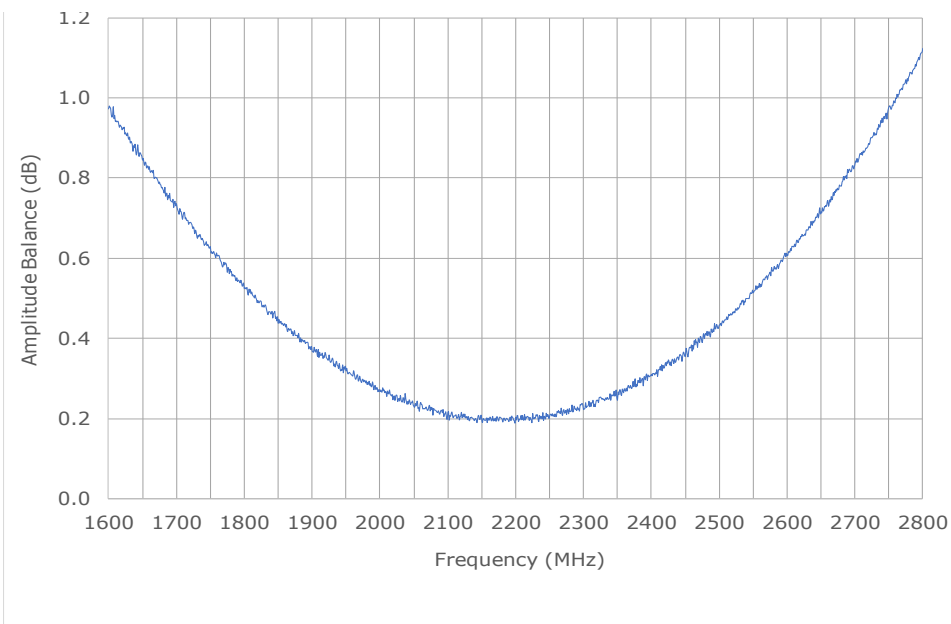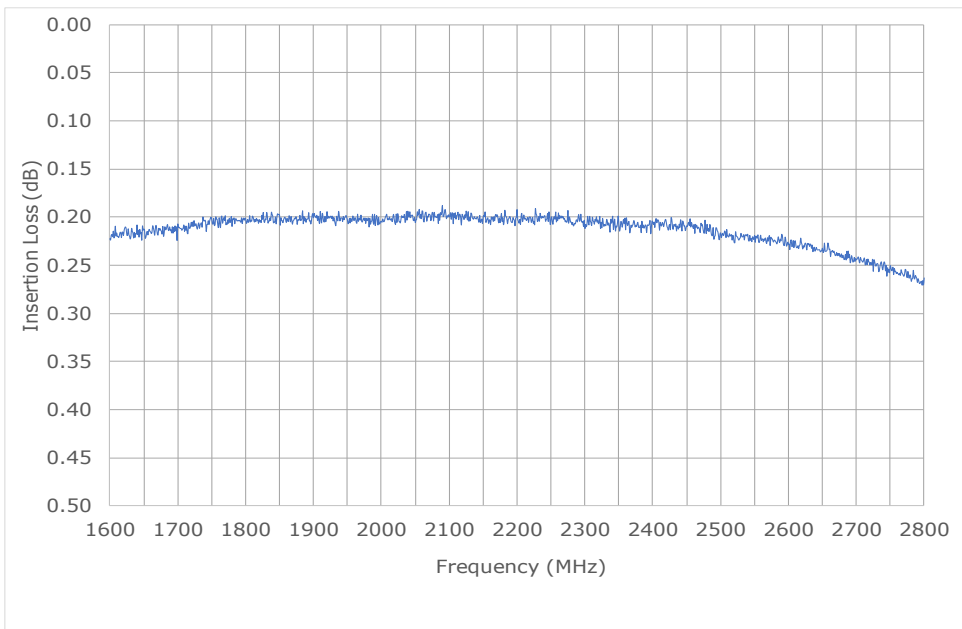

PERFORMANCE PLOTS


90° HYBRID COUPLER

SYNSTRIIP® MODEL: MSQ1628G

WIDE BANDWIDTH

1600 - 2800 MHz

Data @ 25°C

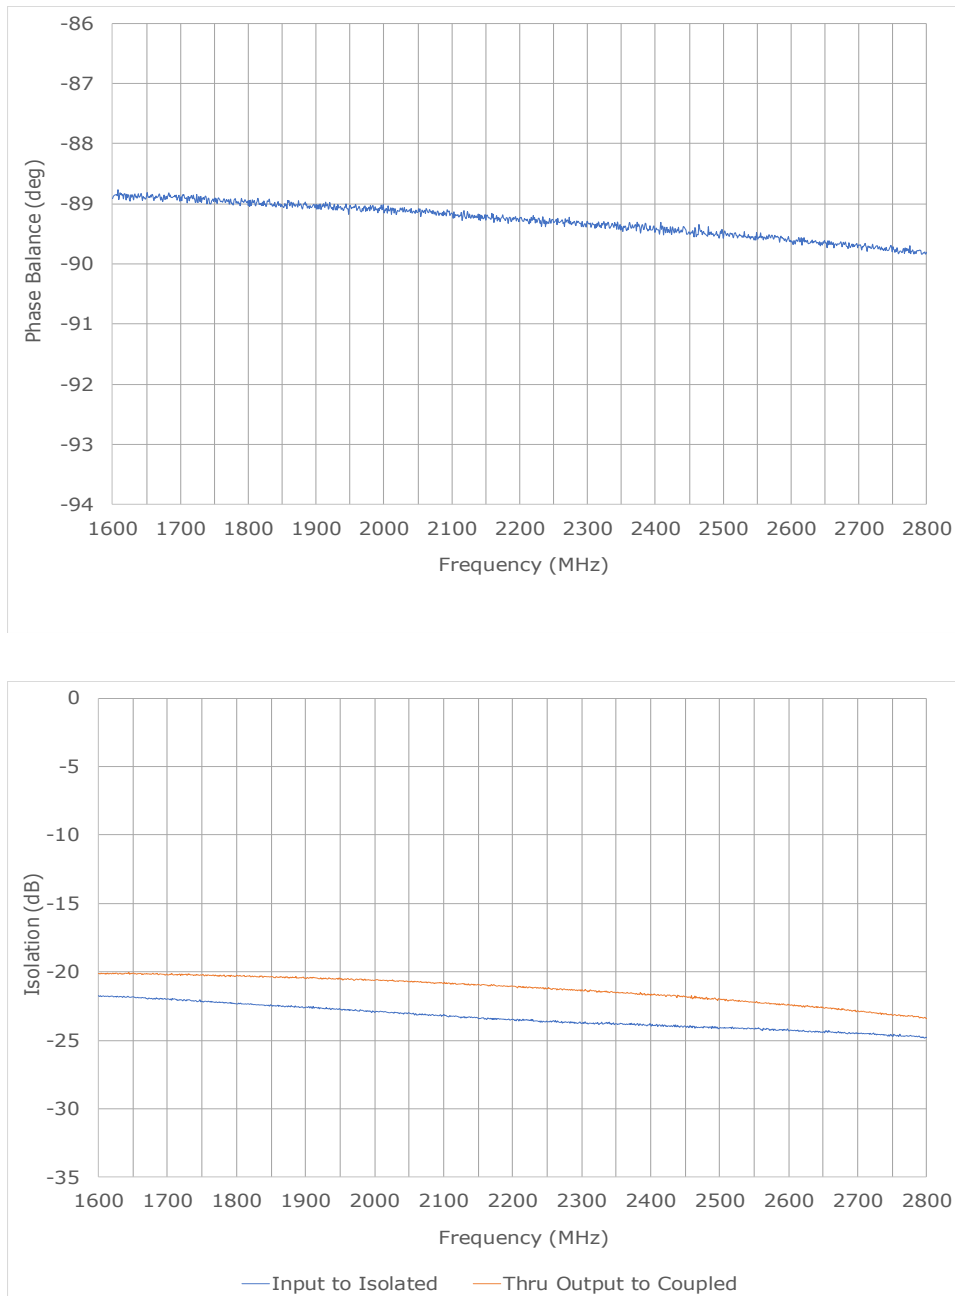

PERFORMANCE PLOTS


90° HYBRID COUPLER

SYNSTRIIP® MODEL: MSQ1628G

WIDE BANDWIDTH

1600 - 2800 MHz

Data @ 25°C

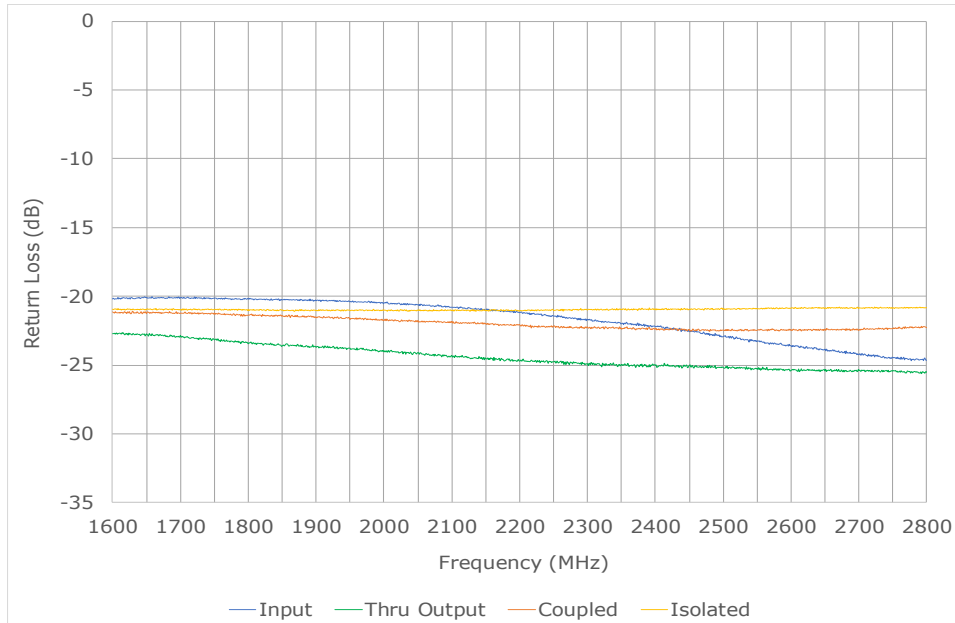

PERFORMANCE PLOTS