

90° HYBRID COUPLER



SYNSTRIIP® MODEL: MSQ3577M

WIDE BANDWIDTH

350 - 775 MHz

FEATURES:

- ▶ Synstrip Technology™
- ▶ Small Package Size, Surface Mount
- ▶ REL-PRO® Patented Technology
- ▶ Building Block For:
 - Power Amplifiers
 - Image Rejection Mixers
 - I & Q / SSB Modulators
 - Phase Shifters & More...

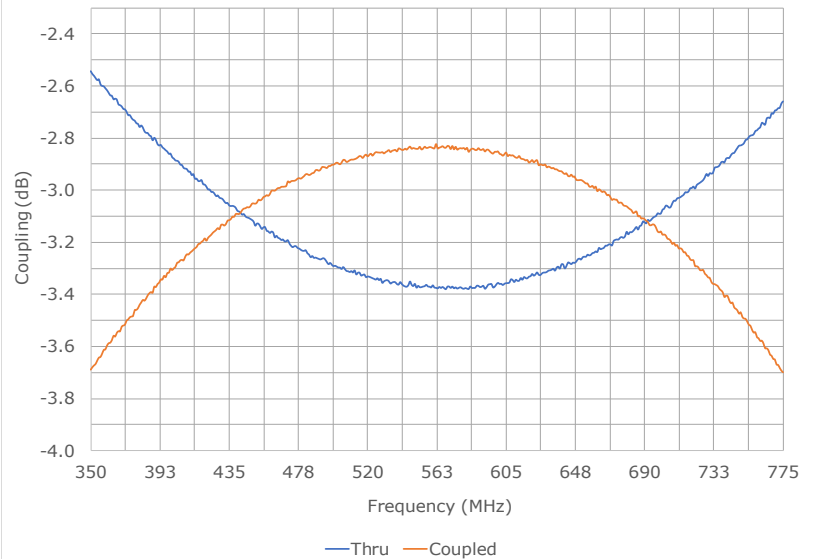

SPECIFICATIONS (Rev. A 07/14/26)

Frequency	350 - 775 MHz		
Insertion Loss (dB) *	Frequency (MHz)	Typ.	Max.
	350 - 775	0.18	0.30
	395 - 740	0.14	0.20
Amplitude Unbalance (dB)	Frequency (MHz)	Typ.	Min.
	350 - 775	1.2	1.6
	395 - 740	0.5	0.8
Phase Unbalance (Deg.)	Frequency (MHz)	Typ.	Min.
	350 - 775	0.6	1.5
	395 - 740	0.5	1.2

Isolation (dB)	Frequency (MHz)	Typ.	Min.
	350 - 775	24	19
	395 - 740	25	20
Power Rating	100 Watts Avg. (CW)		
Impedance	50 Ohms (Nom.)		
VSWR	Frequency (MHz)	Max.	
	350 - 775	1.13:1	
	395 - 740	1.12:1	
Operating Temperature Range	-55 to +85 °C		
* Is the average of the two coupling signals in excess of the 3 dB theoretical signal splitting			


90° HYBRID COUPLER

SYNSTRI[®] MODEL: MSQ3577M

WIDE BANDWIDTH

350 - 775 MHz


Package # 489

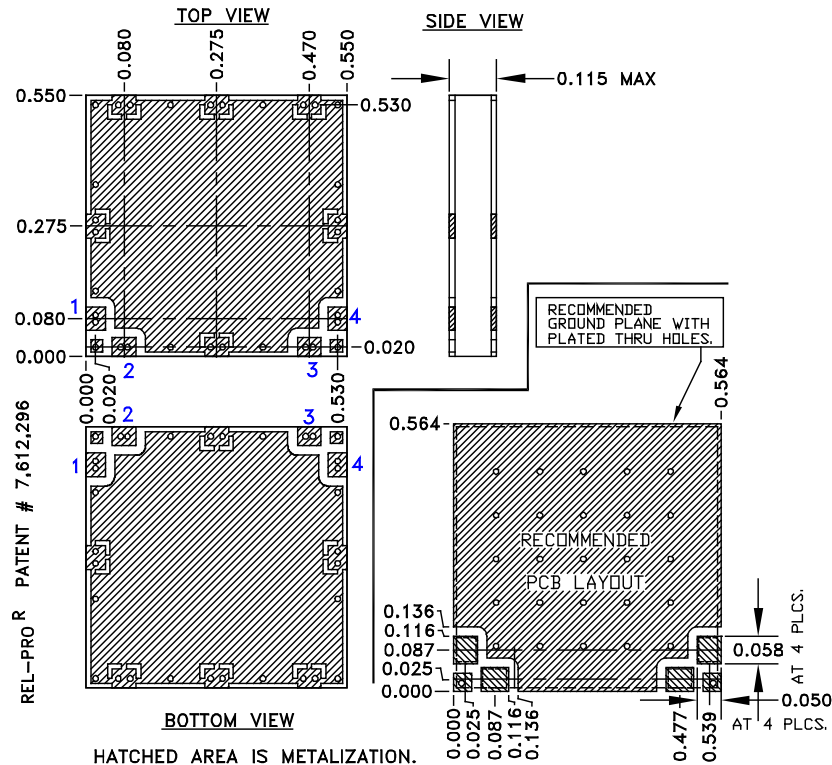

IMPORTANT NOTES:

- 1) THE WIDTH OF THE SIGNAL PADS CORRESPOND TO 50 OHMS. THE DIELECTRIC CONSTANT FOR THE SIGNAL PAD DIMENSIONS SHOWN IS 3.48 AND BOARD THICKNESS OF 0.032".
- 2) THE COUPLER SHOULD BE SOLDER ATTACHED TO THE RECOMMENDED PC BOARD LAYOUT FOR ACHIEVING SPECIFIED PERFORMANCE.

PACKAGE MOUNTING: SEE APPLICATION NOTE AN7200

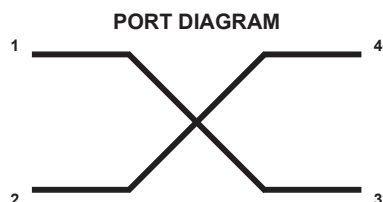

PHASING DIAGRAM

OUT IN	1	2	3	4
1	X	90°	0°	ISO
2	90°	X	ISO	0°
3	0°	ISO	X	90°
4	ISO	0°	90°	X


90° HYBRID COUPLER

SYNSTRI[®] MODEL: MSQ3577M

WIDE BANDWIDTH

350 - 775 MHz

Data @ 25°C

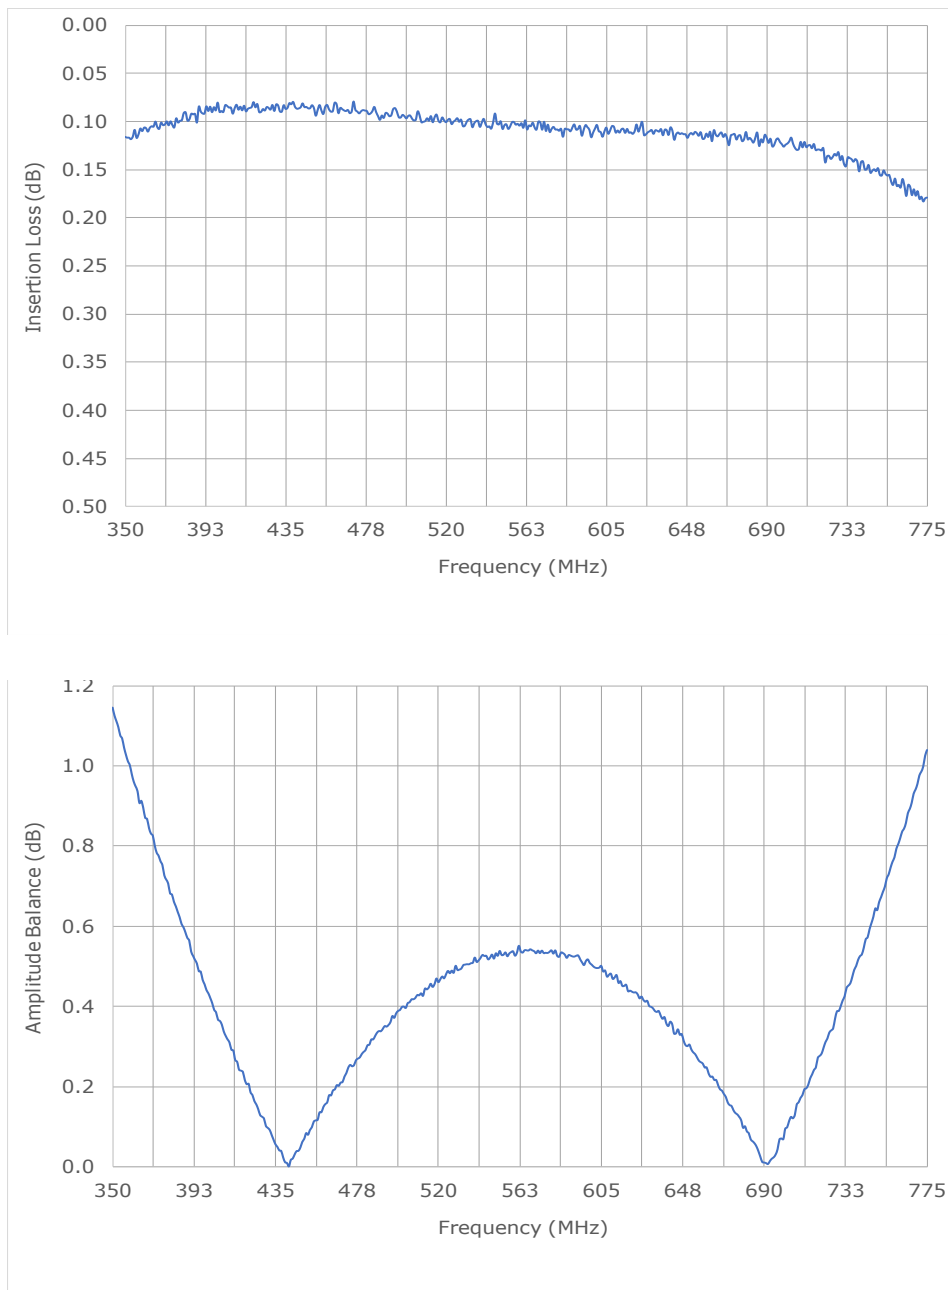

PERFORMANCE PLOTS


90° HYBRID COUPLER

SYNSTRI[®] MODEL: MSQ3577M

WIDE BANDWIDTH

350 - 775 MHz

Data @ 25°C

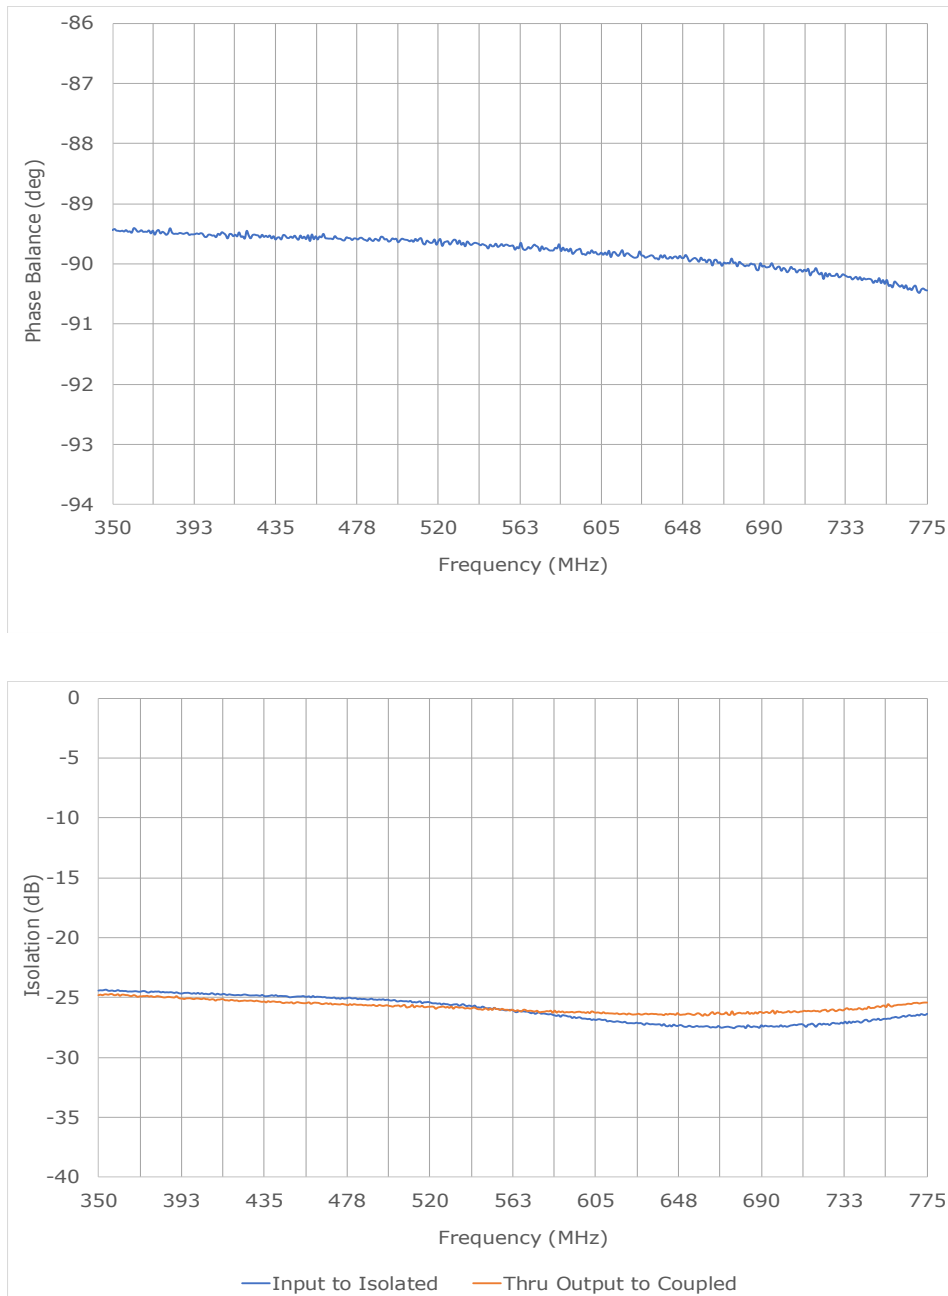

PERFORMANCE PLOTS


90° HYBRID COUPLER

SYNSTRI[®]P MODEL: MSQ3577M

WIDE BANDWIDTH

350 - 775 MHz

Data @ 25°C

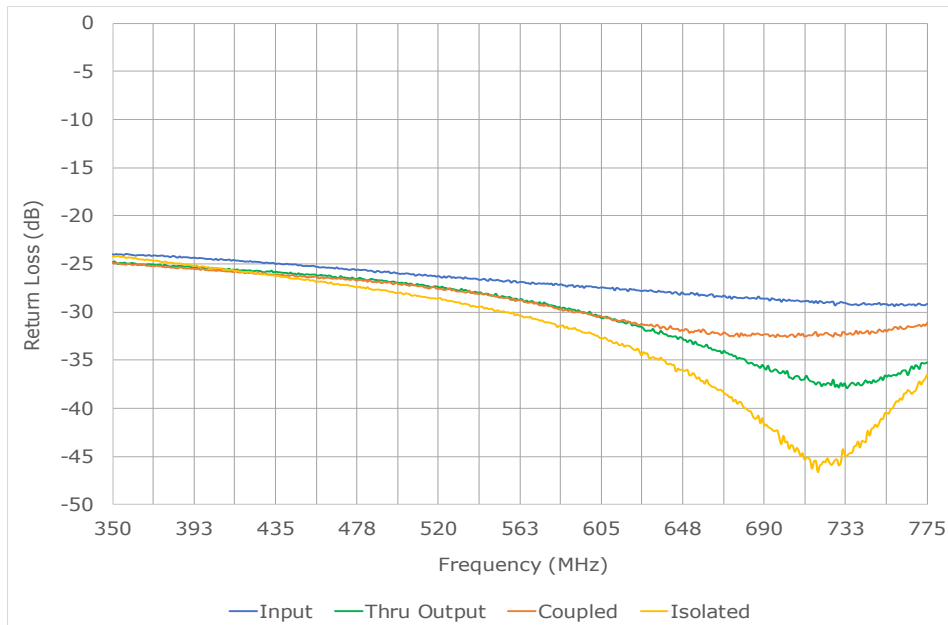

PERFORMANCE PLOTS