

90° HYBRID COUPLER



SYNSTRI[®] MODEL: MSQ7515M

WIDE BANDWIDTH

750 - 1500 MHz

FEATURES:

- ▶ Synstrip Technology™
- ▶ Small Package Size, Surface Mount
- ▶ REL-PRO® Patented Technology
- ▶ Building Block For:
 - Power Amplifiers
 - Image Rejection Mixers
 - I & Q / SSB Modulators
 - Phase Shifters & More...

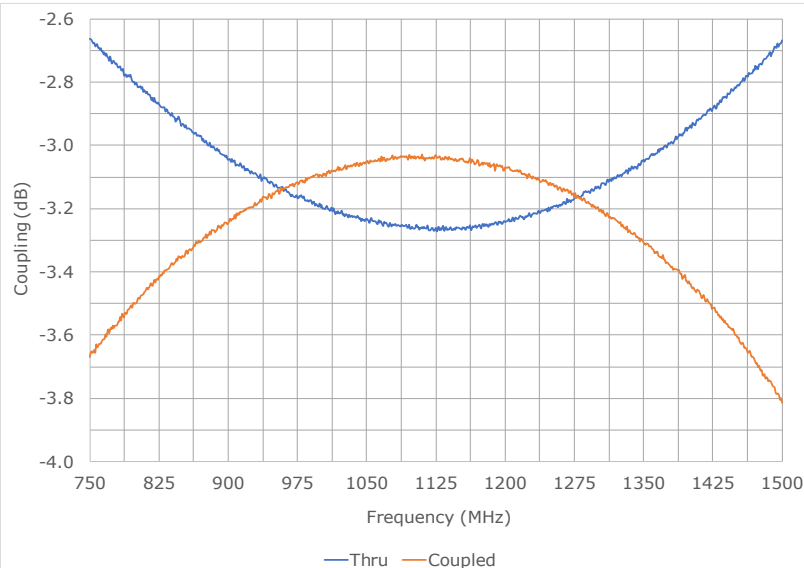

SPECIFICATIONS (Rev. A 07/14/26)

Frequency	750 - 1500 MHz		
Insertion Loss (dB) *	Frequency (MHz)	Typ.	Max.
	750 - 1500	0.24	0.4
	860 - 1360	0.18	0.30
Amplitude Unbalance (dB)	Frequency (MHz)	Typ.	Min.
	750 - 1500	1.1	1.5
	860 - 1360	0.34	0.65
Phase Unbalance (Deg.)	Frequency (MHz)	Typ.	Min.
	750 - 1500	1.2	3.5
	860 - 1360	1.2	3.5

Isolation (dB)	Frequency (MHz)	Typ.	Min.
	750 - 1500	23	19
	860 - 1360	24	20
Power Rating	100 Watts Avg. (CW)		
Impedance	50 Ohms (Nom.)		
VSWR	Frequency (MHz)	Max.	
	750 - 1500	1.25:1	
	860 - 1360	1.25:1	
Operating Temperature Range	-55 to +85 °C		
* Is the average of the two coupling signals in excess of the 3 dB theoretical signal splitting			


90° HYBRID COUPLER

SYNSTRIP® MODEL: MSQ7515M

WIDE BANDWIDTH

750 - 1500 MHz


Package # 491

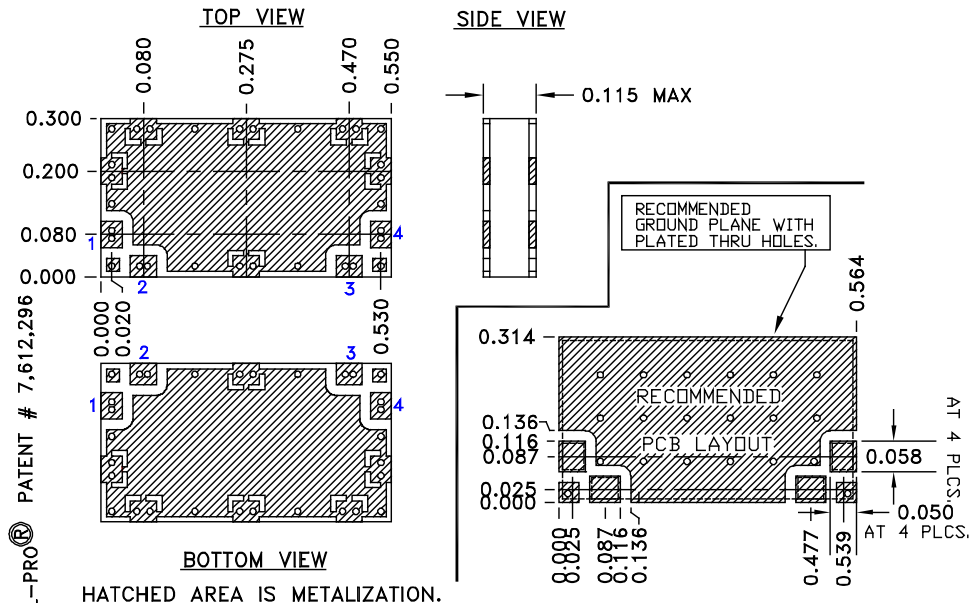

IMPORTANT NOTES:

- 1) THE WIDTH OF THE SIGNAL PADS CORRESPOND TO 50 OHMS. THE DIELECTRIC CONSTANT FOR THE SIGNAL PAD DIMENSIONS SHOWN IS 3.48 AND BOARD THICKNESS OF 0.032".
- 2) THE COUPLER SHOULD BE SOLDER ATTACHED TO THE RECOMMENDED PC BOARD LAYOUT FOR ACHIEVING SPECIFIED PERFORMANCE.

PACKAGE MOUNTING: SEE APPLICATION NOTE AN7200

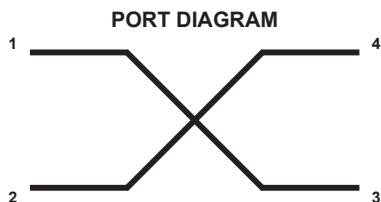

PHASING DIAGRAM

	OUT	1	2	3	4
IN					
1		90°	0°	ISO	
2		90°	ISO	0°	
3		0°	ISO	90°	
4		ISO	0°	90°	



90° HYBRID COUPLER

SYNSTRIP® MODEL: MSQ7515M

WIDE BANDWIDTH

750 - 1500 MHz

Data @ 25°C

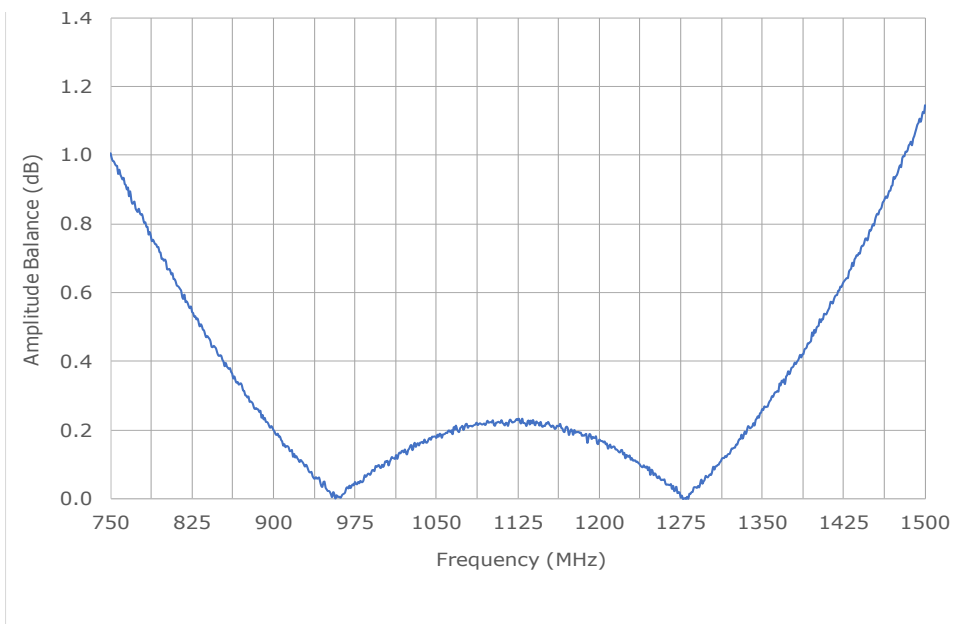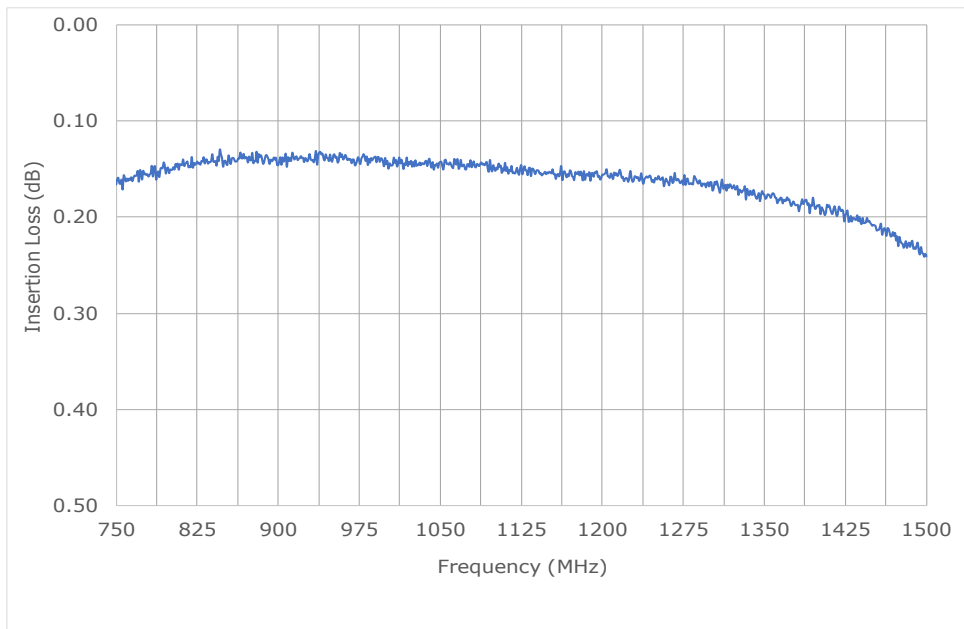

PERFORMANCE PLOTS


90° HYBRID COUPLER

SYNSTRIP® MODEL: MSQ7515M

WIDE BANDWIDTH

750 - 1500 MHz

Data @ 25°C

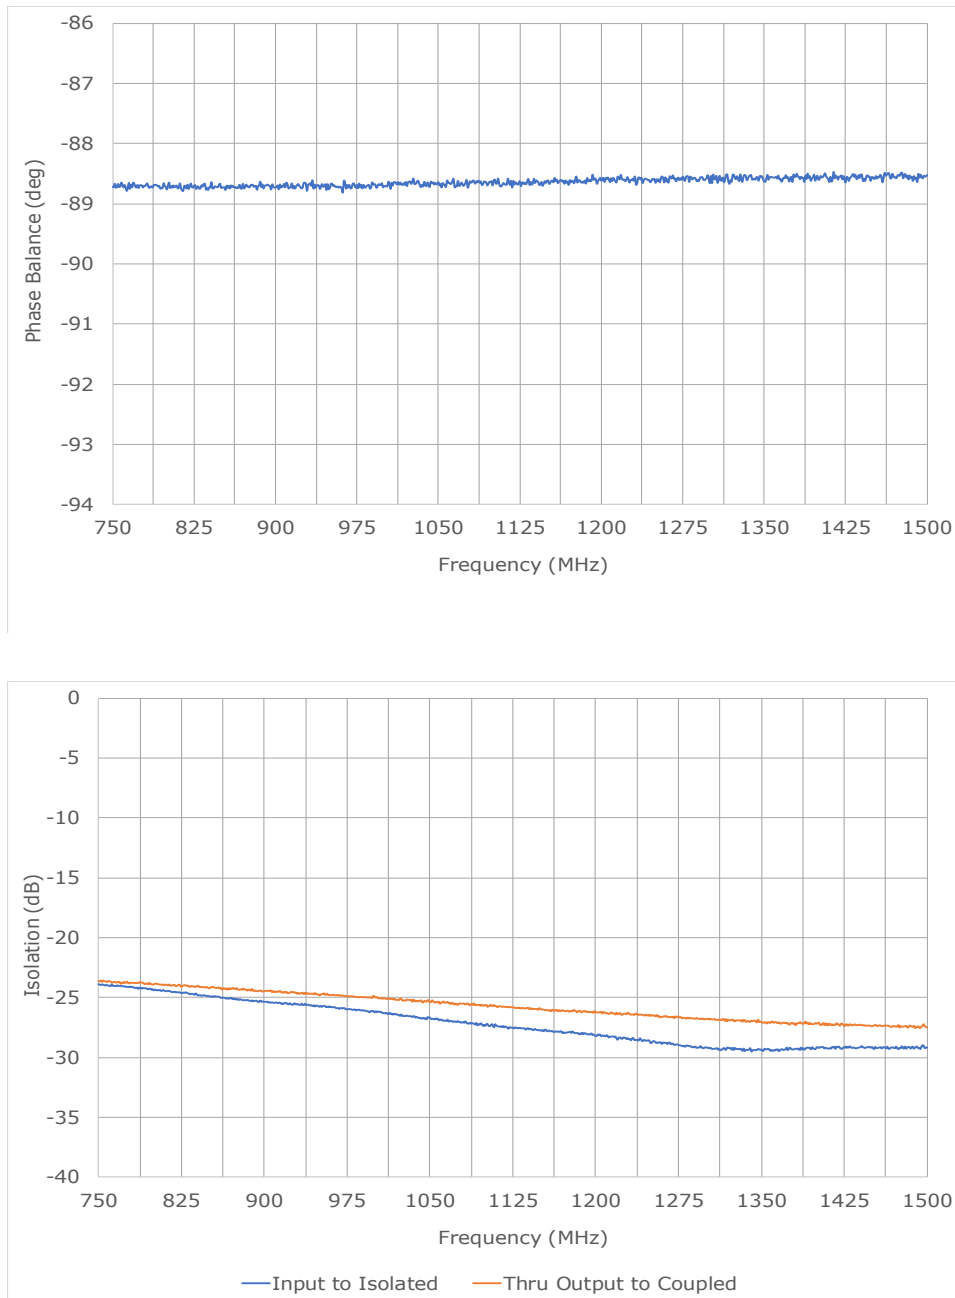

PERFORMANCE PLOTS


90° HYBRID COUPLER

SYNSTRIP® MODEL: MSQ7515M

WIDE BANDWIDTH

750 - 1500 MHz

Data @ 25°C

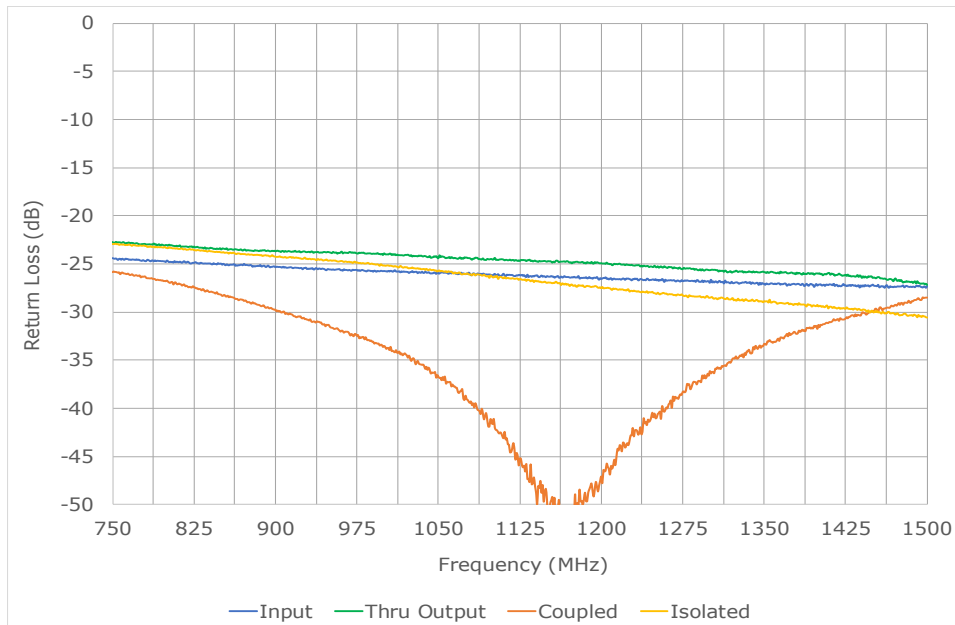

PERFORMANCE PLOTS