

90° HYBRID COUPLER



SYNSTRI[®] MODEL: MSQ8216M

WIDE BANDWIDTH

825 - 1650 MHz

FEATURES:

- ▶ Synstrip Technology™
- ▶ Small Package Size, Surface Mount
- ▶ REL-PRO® Patented Technology
- ▶ Building Block For:
 - Power Amplifiers
 - Image Rejection Mixers
 - I & Q / SSB Modulators
 - Phase Shifters & More...

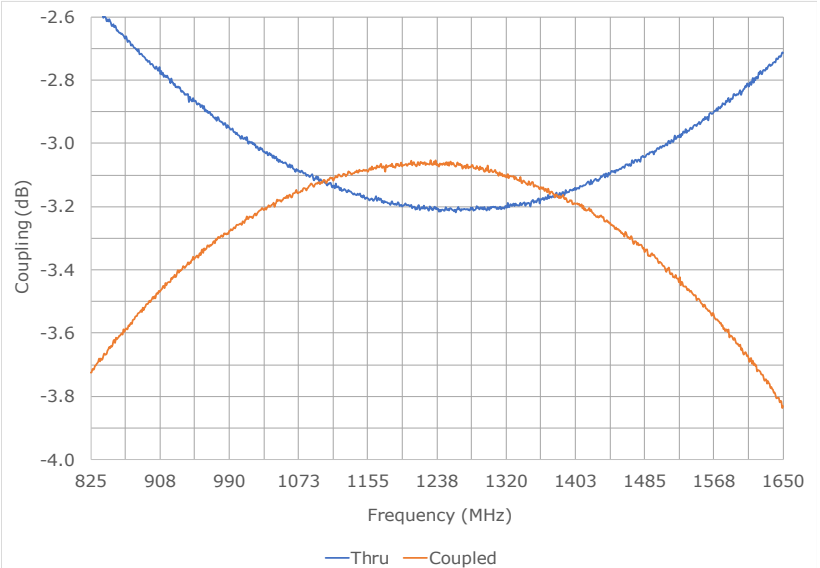

SPECIFICATIONS (Rev. A 07/14/26)

Frequency	825 - 1650 MHz		
Insertion Loss (dB) *	Frequency (MHz)	Typ.	Max.
	825 - 1650	0.27	0.4
	990 - 1480	0.19	0.27
Amplitude Unbalance (dB)	Frequency (MHz)	Typ.	Min.
	825 - 1650	1.2	1.6
	990 - 1480	0.34	0.65
Phase Unbalance (Deg.)	Frequency (MHz)	Typ.	Min.
	825 - 1650	2	4
	990 - 1480	4	4

Isolation (dB)	Frequency (MHz)	Typ.	Min.
	825 - 1650	20	16
	990 - 1480	23	19
Power Rating	100 Watts Avg. (CW)		
Impedance	50 Ohms (Nom.)		
VSWR	Frequency (MHz)	Max.	
	825 - 1650	1.5:1	
	990 - 1480	1.5:1	
Operating Temperature Range	-55 to +85 °C		
* Is the average of the two coupling signals in excess of the 3 dB theoretical signal splitting			


90° HYBRID COUPLER

SYNSTRIIP® MODEL: MSQ8216M

WIDE BANDWIDTH

825 - 1650 MHz


Package # 491

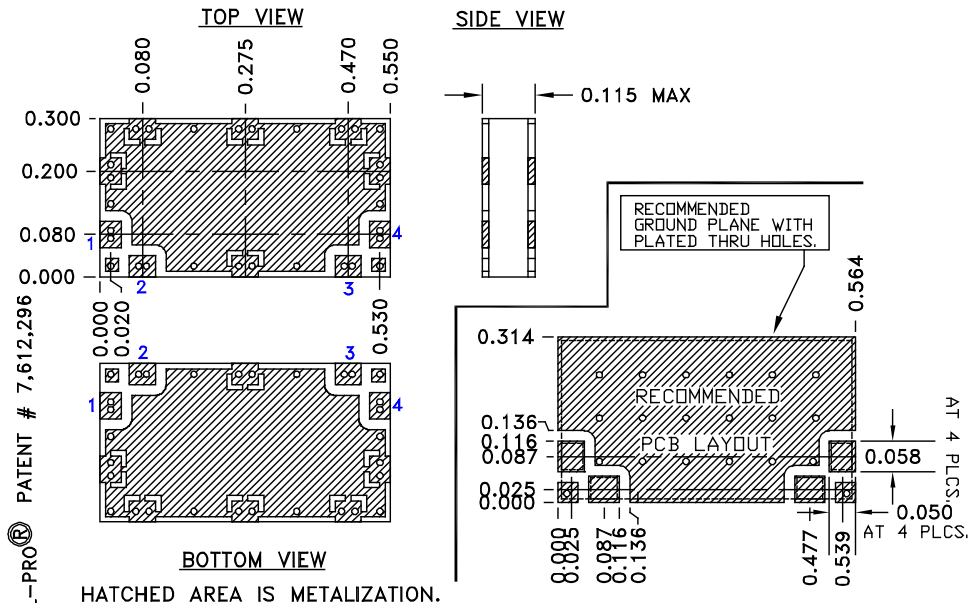

IMPORTANT NOTES:

- 1) THE WIDTH OF THE SIGNAL PADS CORRESPOND TO 50 OHMS. THE DIELECTRIC CONSTANT FOR THE SIGNAL PAD DIMENSIONS SHOWN IS 3.48 AND BOARD THICKNESS OF 0.032".
- 2) THE COUPLER SHOULD BE SOLDER ATTACHED TO THE RECOMMENDED PC BOARD LAYOUT FOR ACHIEVING SPECIFIED PERFORMANCE.

PACKAGE MOUNTING: SEE APPLICATION NOTE AN7200

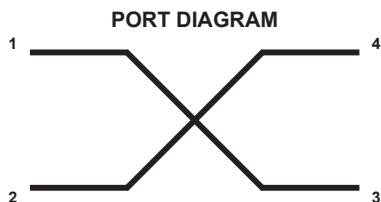

PHASING DIAGRAM

	OUT	1	2	3	4
IN					
1			90°	0°	ISO
2		90°		ISO	0°
3		0°	ISO		90°
4		ISO	0°	90°	



90° HYBRID COUPLER

SYNSTRIP® MODEL: MSQ8216M

WIDE BANDWIDTH

825 - 1650 MHz

Data @ 25°C

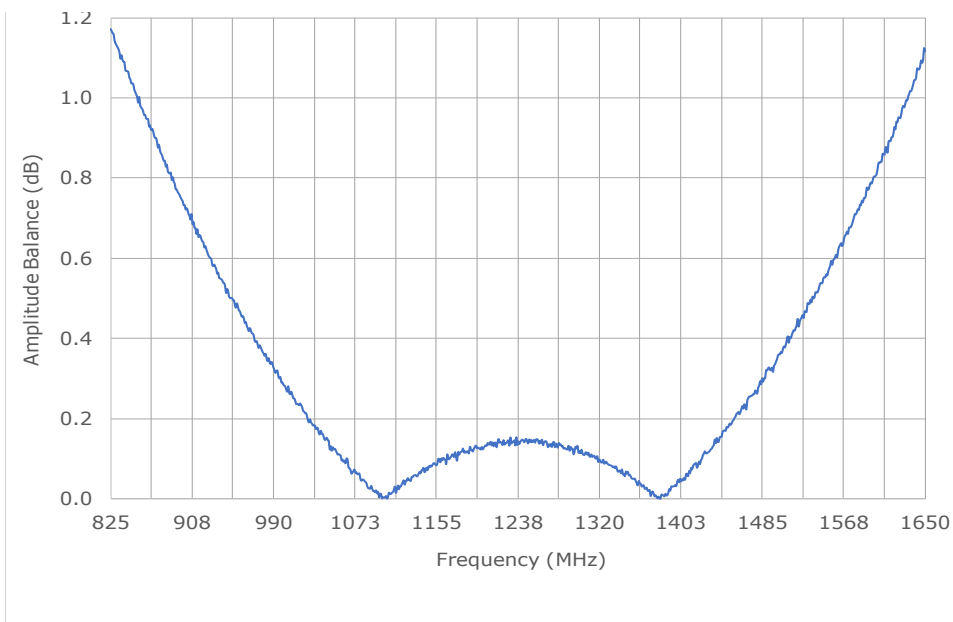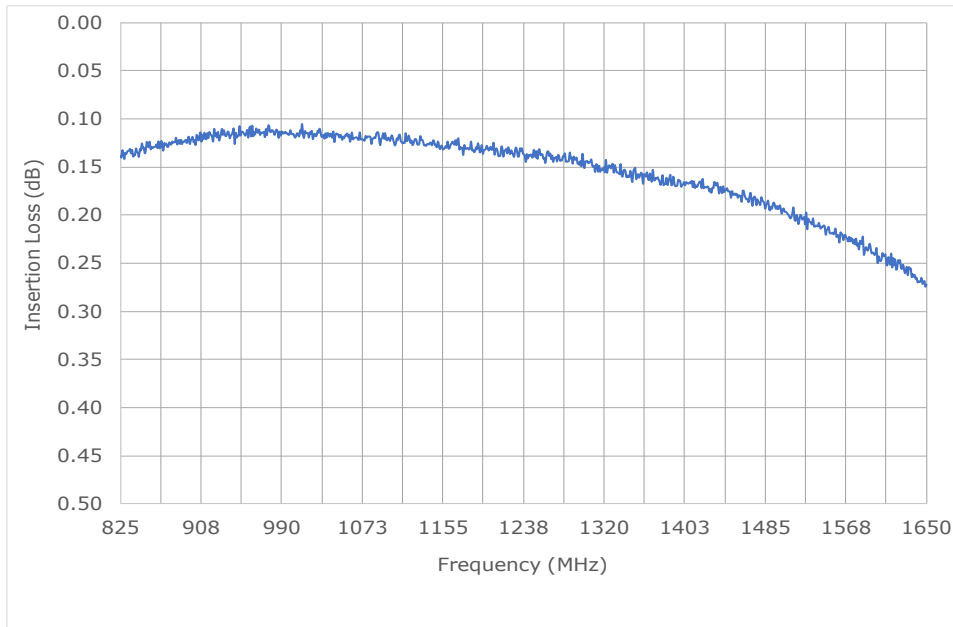

PERFORMANCE PLOTS


90° HYBRID COUPLER

SYNSTRIP® MODEL: MSQ8216M

WIDE BANDWIDTH

825 - 1650 MHz

Data @ 25°C

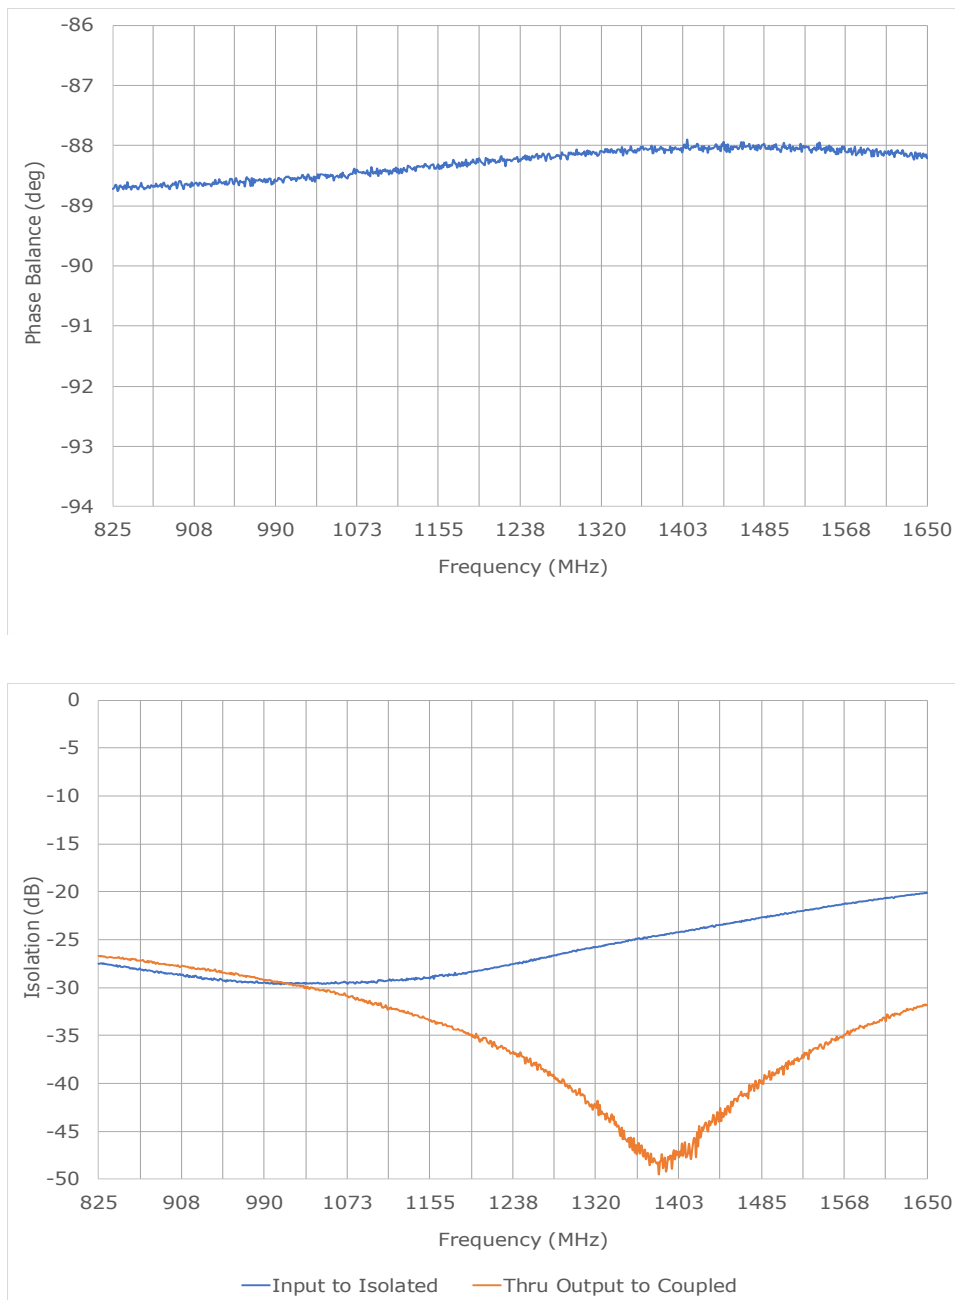

PERFORMANCE PLOTS


90° HYBRID COUPLER

SYNSTRIP® MODEL: MSQ8216M

WIDE BANDWIDTH

825 - 1650 MHz

Data @ 25°C

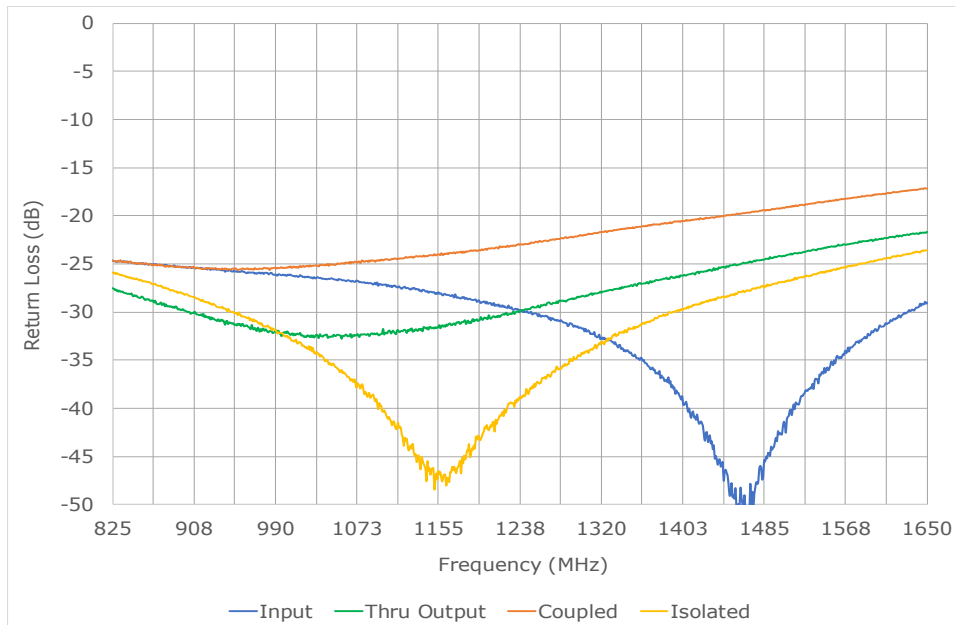

PERFORMANCE PLOTS