

90° HYBRID COUPLER



SYNSTRI[®] MODEL: MSQ9218M

WIDE BANDWIDTH

925 - 1850 MHz

FEATURES:

- ▶ Synstrip Technology™
- ▶ Small Package Size, Surface Mount
- ▶ REL-PRO® Patented Technology
- ▶ Building Block For:
 - Power Amplifiers
 - Image Rejection Mixers
 - I & Q / SSB Modulators
 - Phase Shifters & More...

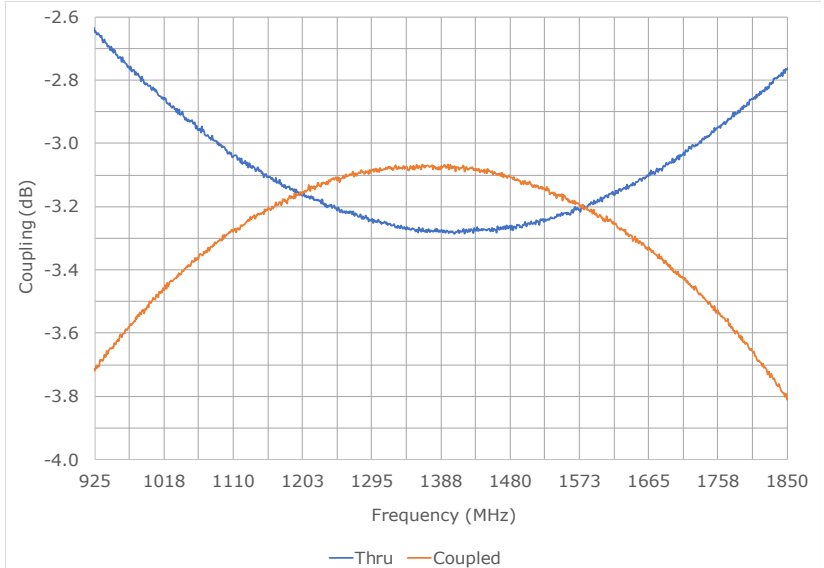

SPECIFICATIONS (Rev. A 07/14/26)

Frequency	925 - 1850 MHz		
Insertion Loss (dB) *	Frequency (MHz)	Typ.	Max.
	925 - 1850	0.28	0.45
	1110 - 1650	0.23	0.35
Amplitude Unbalance (dB)	Frequency (MHz)	Typ.	Min.
	925 - 1850	1.1	1.5
	1110 - 1650	0.25	0.7
Phase Unbalance (Deg.)	Frequency (MHz)	Typ.	Min.
	925 - 1850	1.1	3
	1110 - 1650	1.1	3

Isolation (dB)	Frequency (MHz)	Typ.	Min.
	925 - 1850	26	20
	1110 - 1650	26	20
Power Rating	100 Watts Avg. (CW)		
Impedance	50 Ohms (Nom.)		
VSWR	Frequency (MHz)	Max.	
	925 - 1850	1.25:1	
	1110 - 1650	1.25:1	
Operating Temperature Range	-55 to +85 °C		
* Is the average of the two coupling signals in excess of the 3 dB theoretical signal splitting			


90° HYBRID COUPLER

SYNSTRIP® MODEL: MSQ9218M

WIDE BANDWIDTH


925 - 1850 MHz

Package # 491

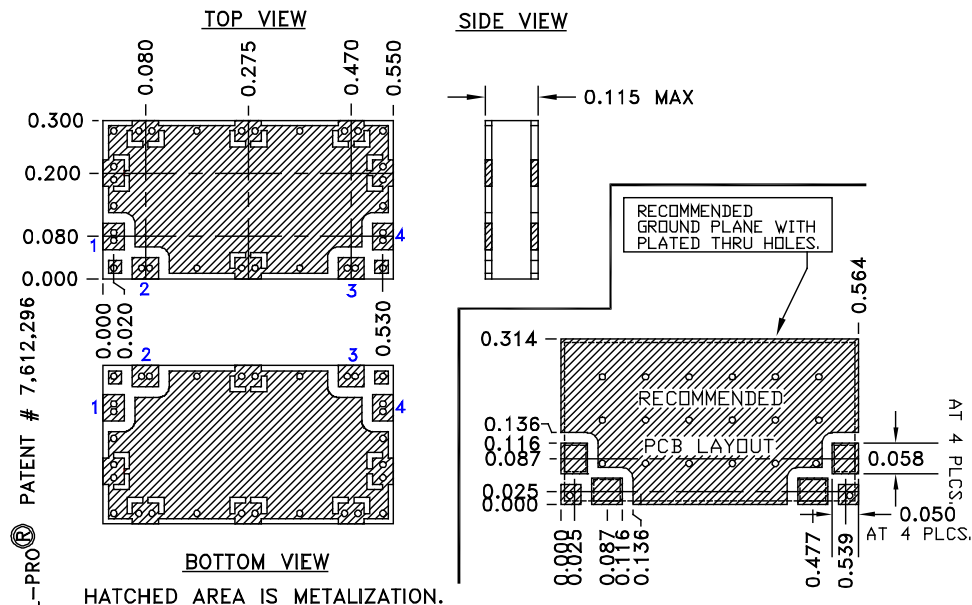

IMPORTANT NOTES:

- 1) THE WIDTH OF THE SIGNAL PADS CORRESPOND TO 50 OHMS. THE DIELECTRIC CONSTANT FOR THE SIGNAL PAD DIMENSIONS SHOWN IS 3.48 AND BOARD THICKNESS OF 0.032".
 - 2) THE COUPLER SHOULD BE SOLDER ATTACHED TO THE RECOMMENDED PC BOARD LAYOUT FOR ACHIEVING SPECIFIED PERFORMANCE.
- PACKAGE MOUNTING: SEE APPLICATION NOTE AN7200

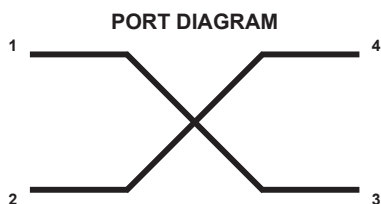

PHASING DIAGRAM

OUT IN	1	2	3	4
1	X	90°	0°	ISO
2	90°	X	ISO	0°
3	0°	ISO	X	90°
4	ISO	0°	90°	X


90° HYBRID COUPLER

SYNSTRI[®] MODEL: MSQ9218M

WIDE BANDWIDTH

925 - 1850 MHz

Data @ 25°C

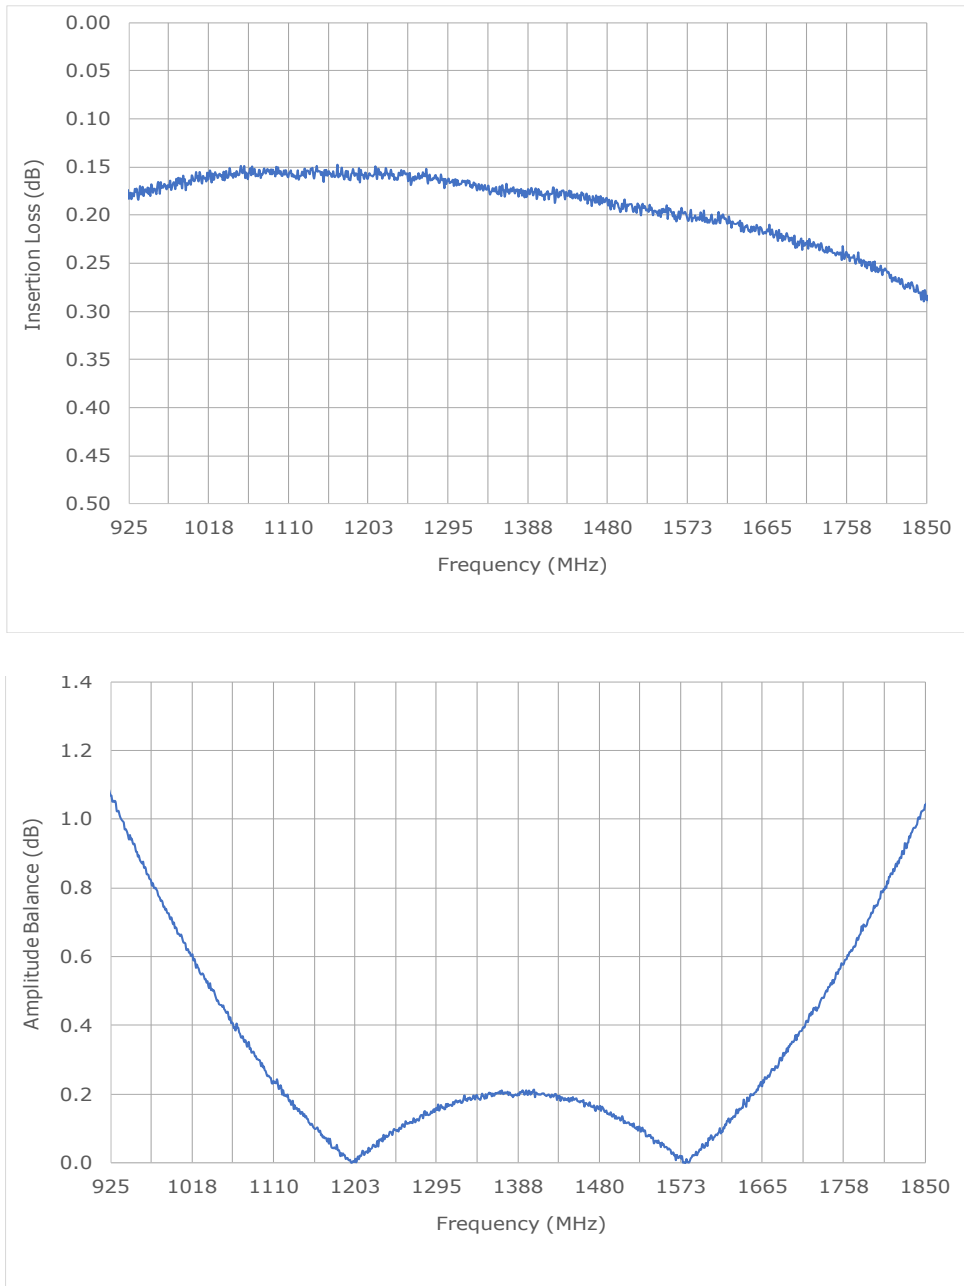

PERFORMANCE PLOTS



90° HYBRID COUPLER

SYNSTRIP® MODEL: MSQ9218M

WIDE BANDWIDTH

925 - 1850 MHz

Data @ 25°C

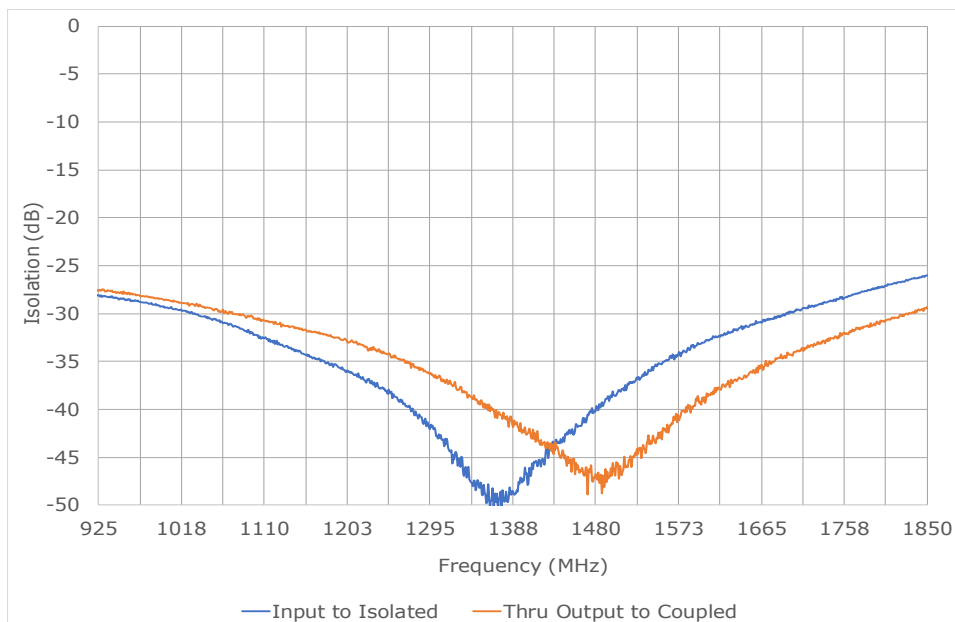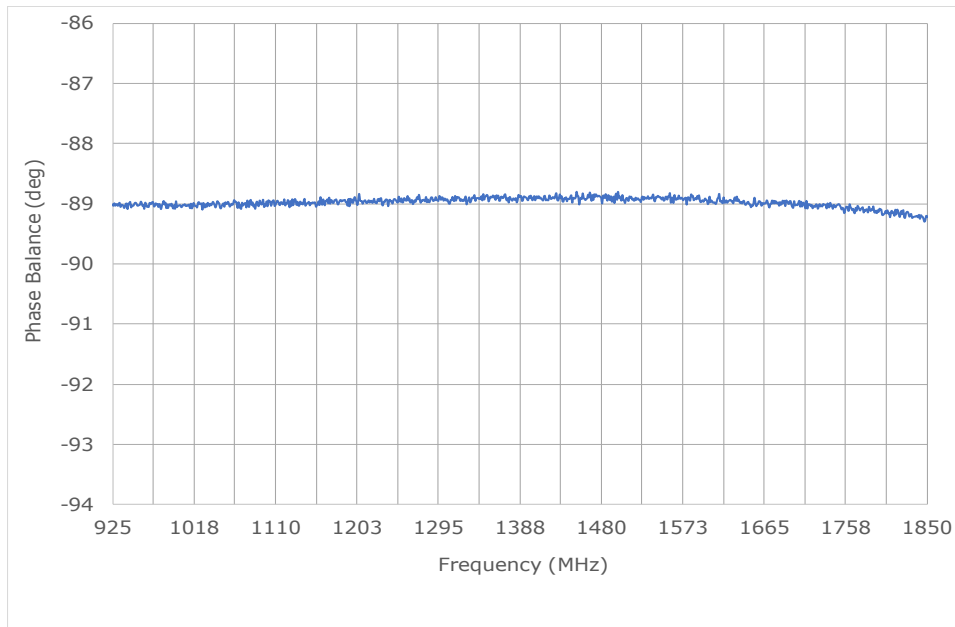

PERFORMANCE PLOTS


90° HYBRID COUPLER

SYNSTRIP® MODEL: MSQ9218M

WIDE BANDWIDTH

925 - 1850 MHz

Data @ 25°C

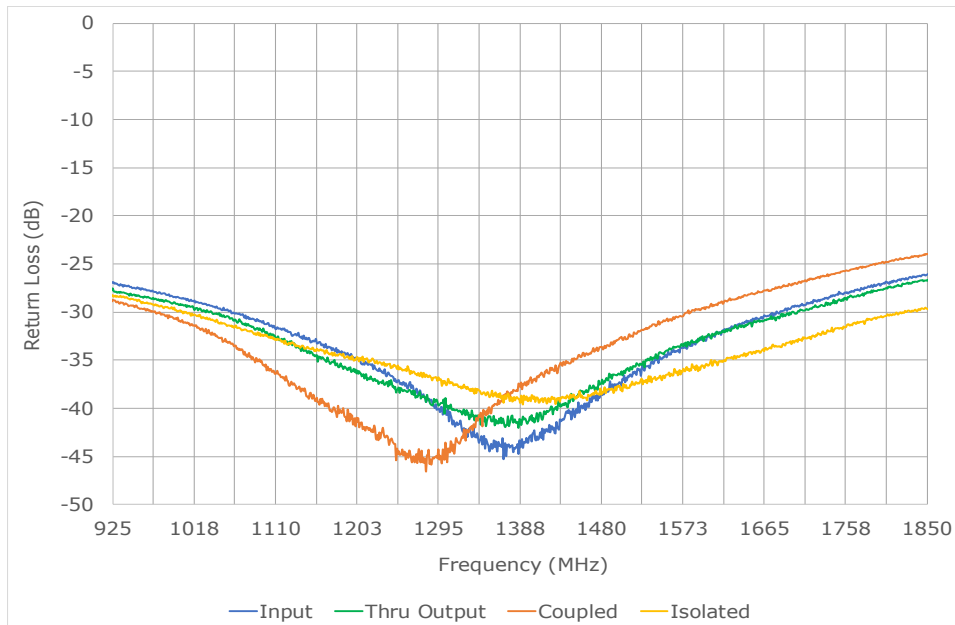

PERFORMANCE PLOTS