

BI-DIRECTIONAL COUPLER

SURFACE MOUNT MODEL: SBCHP-2082

WIDE BANDWIDTH



200 - 820 MHz

FEATURES:

- ▶ High Power Rating
- ▶ Low Insertion Loss
- ▶ Excellent Coupling Flatness
- ▶ High Directivity

APPLICATION:

- ▶ Antenna Signal Monitoring

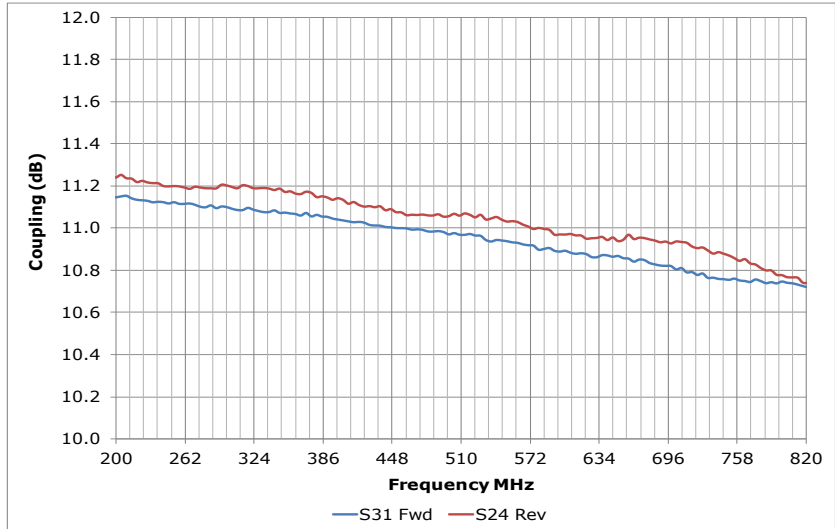

SPECIFICATIONS (Rev. A 02/24/22)


Frequency	200 - 820 MHz		
Coupling	11.0 ±0.46 dB (Nom.)		
Coupling Flatness	±0.5 dB (Max.)		
Mainline Loss ¹	Freq. (MHz)	Typ.	Max.
	200 - 450	0.48	0.70
	450 - 650	0.60	0.85
Directivity (dB) ²	Freq. (MHz)	Typ.	Min.
	200 - 450	23	20
	450 - 650	24	20
Input Power Rating	Freq. (MHz)	Watts (Avg.)	
	200 - 600	25	
	600 - 820	20	
Impedance	50 Ohms (Nom.)		
VSWR	1.3:1 (Typ.) / 1.45:1 (Max.)		
Operating Temperature Range	-40 to +85 °C		
Storage Temperature Range	-55 to +100 °C		
¹ Including Coupling Loss.			
² Directivity is the isolation value minus the coupling value.			

Package # 129LF-3

DETAIL - A

PACKAGE MOUNTING: SEE APPLICATION NOTE AN7301.
TOLERANCES ON THREE DIMENSIONS ARE IN INCHES.
DECIMAL PLACES = ± 0.015

PORT CONFIGURATION				
Input	Output	FWD. Coupled	REV. Coupled	Gnd.
1	6	3	4	All Others

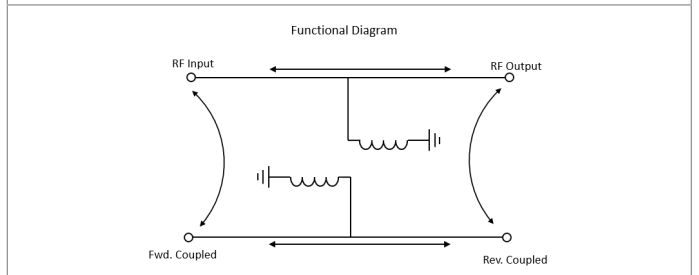



BI-DIRECTIONAL COUPLER

SURFACE MOUNT MODEL: SBCHP-2082

WIDE BANDWIDTH

200 - 820 MHz

PERFORMANCE PLOTS

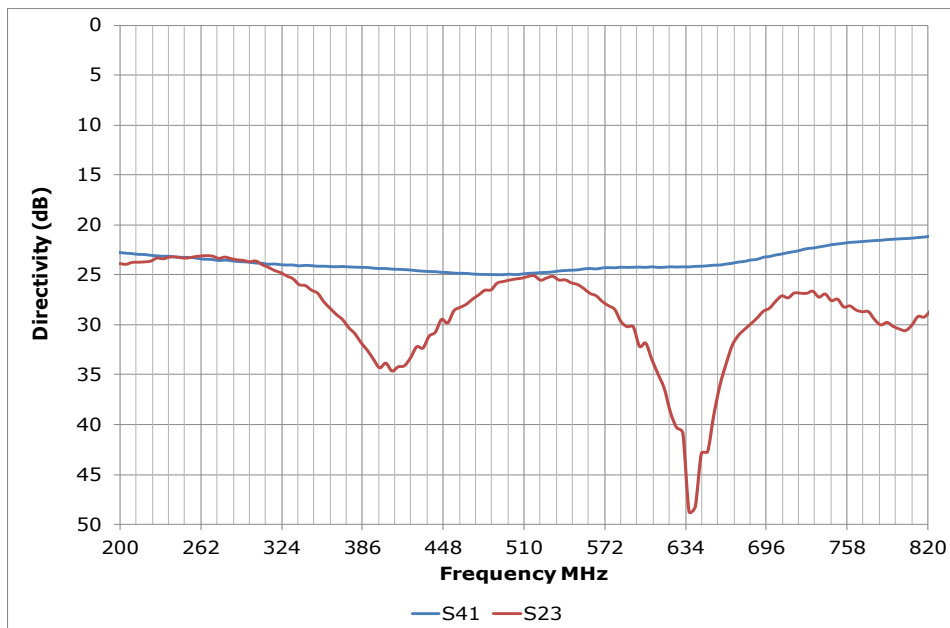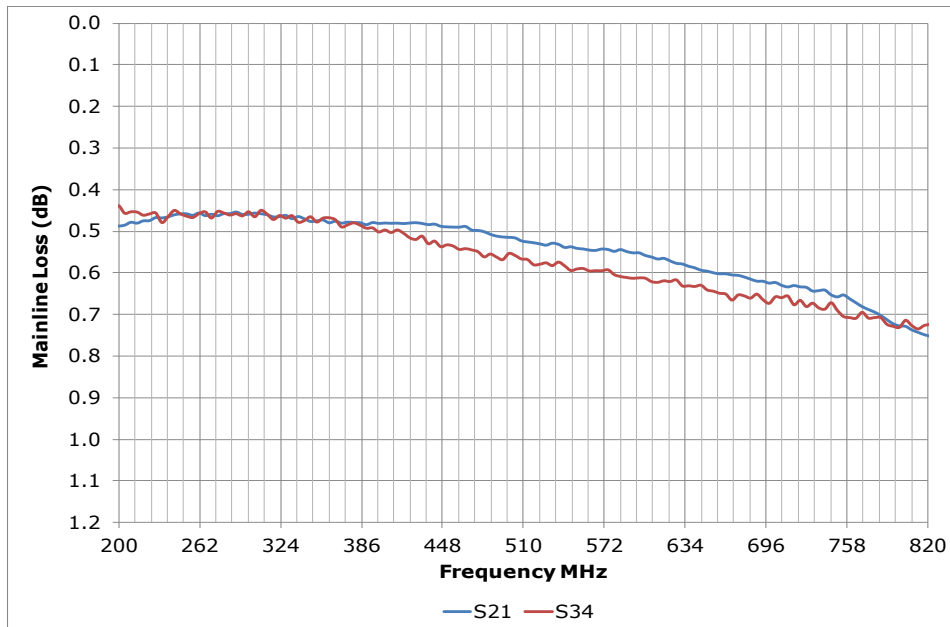


BI-DIRECTIONAL COUPLER

SURFACE MOUNT MODEL: SBCHP-2082

WIDE BANDWIDTH

200 - 820 MHz

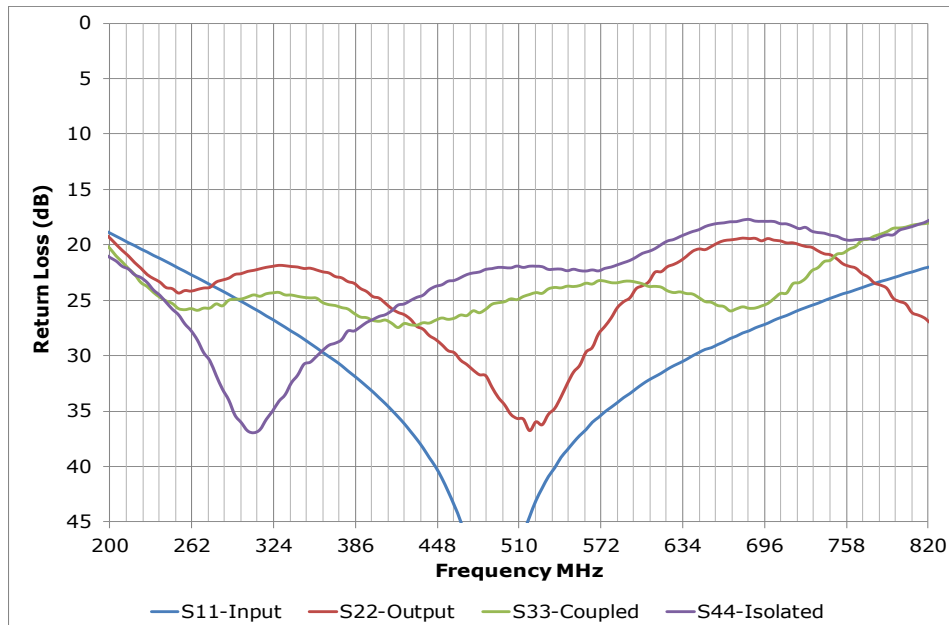

PERFORMANCE PLOTS