

90° HYBRID

SURFACE MOUNT MODEL: DQS-40-200

FREQUENCY BANDWIDTH

40 - 200 MHz

FEATURES:

- ▶ Ultra-Wide Bandwidth (5:1)
- ▶ Small Package Size, Surface Mount
- ▶ Building Block For:
 - Power Amplifiers
 - Image Rejection Mixers
 - I & Q / SSB Modulators
 - Phase Shifters & More...



SPECIFICATIONS (Rev. B 06/26/25)

Frequency	40 - 200 MHz	
Insertion Loss (dB) *	Typ.	Max.
	1.0	1.4
Amplitude Unbalance (dB)	Typ.	Max.
	0.5	1.0
Phase Unbalance (Deg.)	Typ.	Max.
	2.0	4.0
Isolation (dB)	Typ.	Min.
	25	18
Input Power	1 Watt (Max.)	
Impedance	50 Ohms (Nom.)	
VSWR	1.3:1 (Typ.)	
Operating Temperature Range	-40 to +85 °C	

* Insertion loss in excess of the theoretical 3 dB coupling.

Package #	102SLF
-----------	--------

TOP VIEW

SIDE VIEW

TOLERANCES ON THREE DECIMAL PLACES= ± 0.010

BOTTOM VIEW

LAYOUT FOT PRINTED CIRCUIT DESIGN

PORT CONFIGURATION				
Input	Isolated*	+90° Output	0° Output	GND
1	2	8	7	All Others

* Terminate ISOLATED port with 50 Ohms.



90° HYBRID

SURFACE MOUNT MODEL: DQS-40-200

FREQUENCY BANDWIDTH

40 - 200 MHz

Data @ 25°C

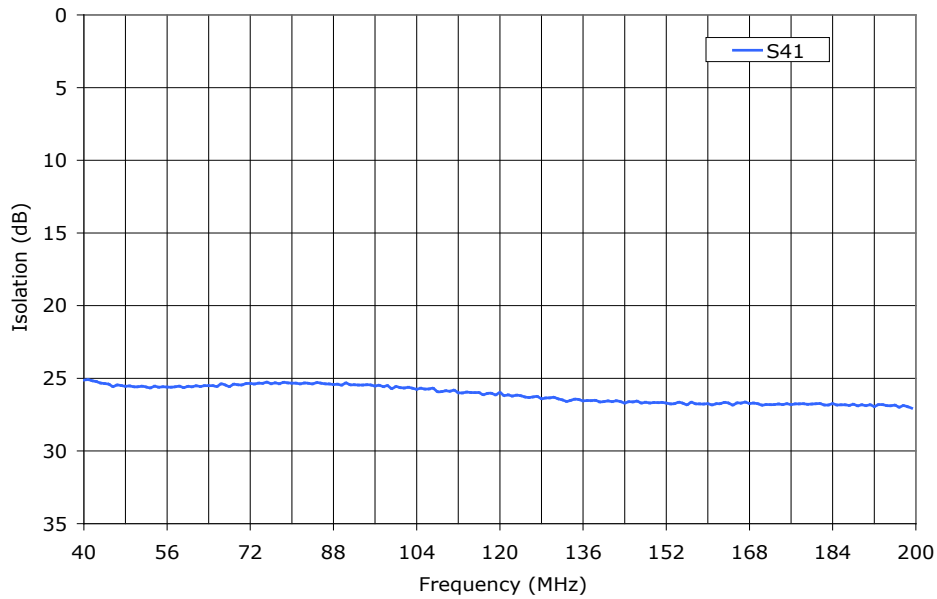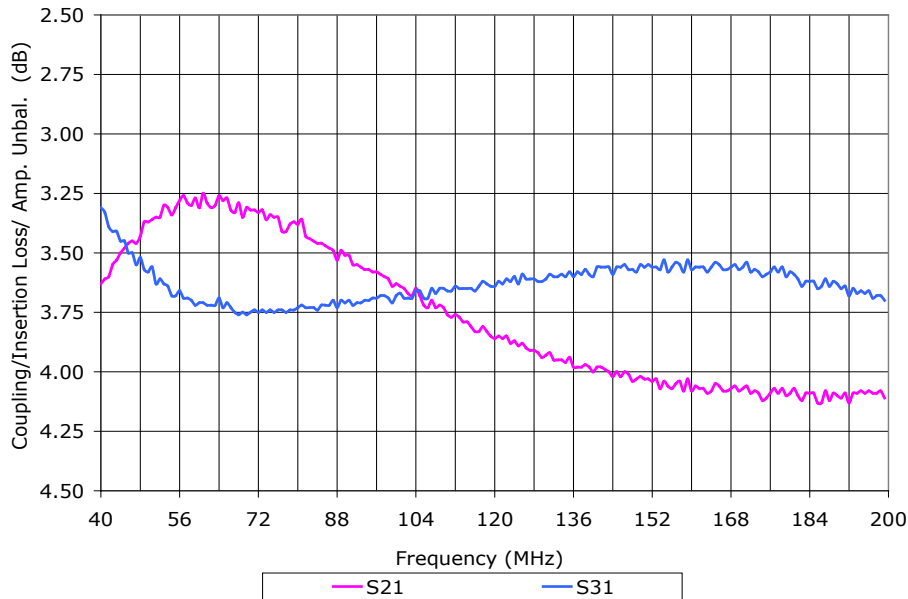

PERFORMANCE PLOTS

90° HYBRID



SURFACE MOUNT MODEL: DQS-40-200

FREQUENCY BANDWIDTH

40 - 200 MHz

Data @ 25°C

PERFORMANCE PLOTS

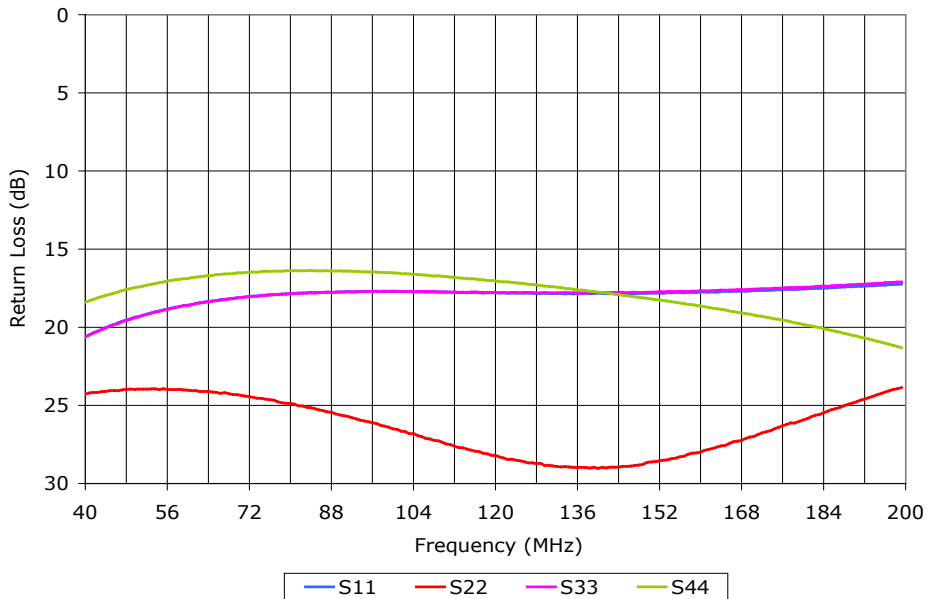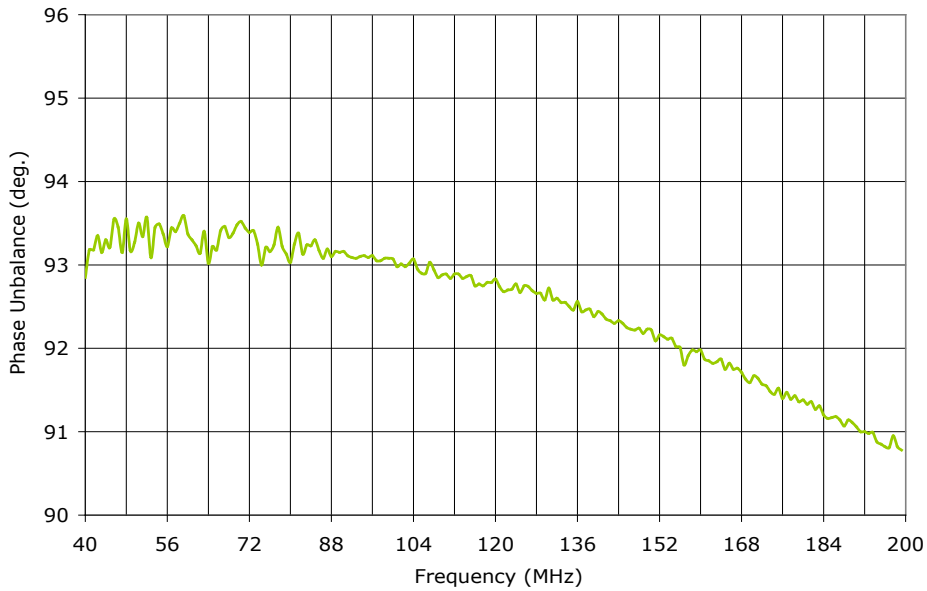


90° HYBRID

SURFACE MOUNT MODEL: DQS-40-200

FREQUENCY BANDWIDTH

40 - 200 MHz

Data @ 25°C

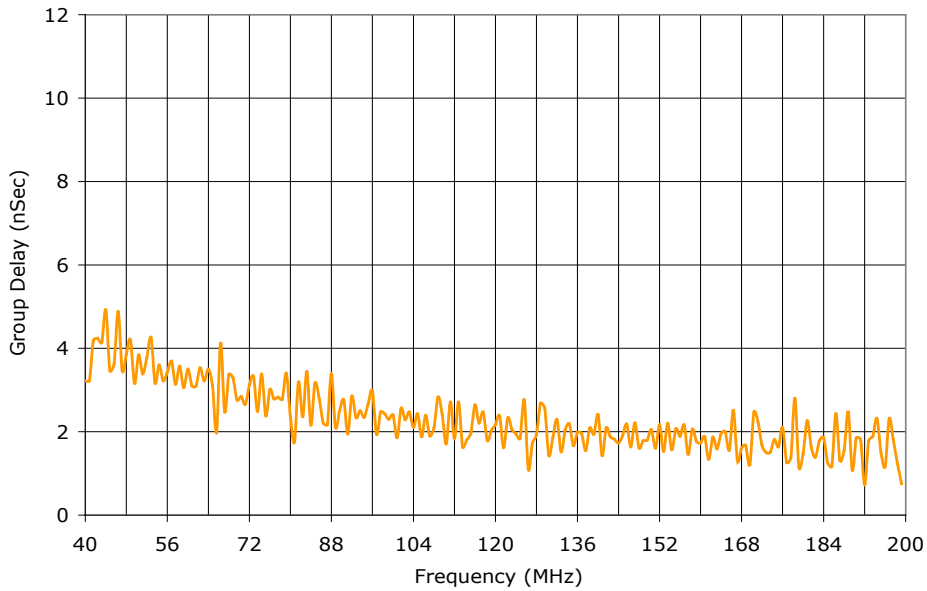

PERFORMANCE PLOTS