

SELECTABLE FREQUENCY SYNTHESIZER

SURFACE MOUNT MODEL: FCPL3644-26


360 - 440 MHz

FEATURES:

- ▶ Exceptional Phase Noise
- ▶ No Programming Required
- ▶ Lead Free - RoHS Compliant
- ▶ Patented REL-PRO® Technology
- ▶ Small Size, Surface Mount



Phase Noise

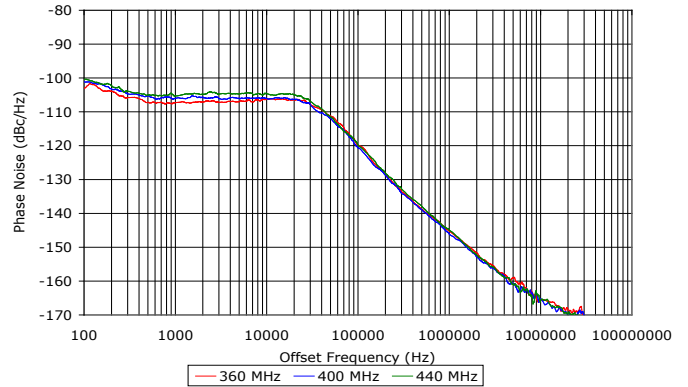

SPECIFICATIONS (Rev. A 04/25/11)

Frequency	360 - 440 MHz		
Reference Input Frequency	26 MHz		
Reference Input Voltage	1.0 V p-p to 3.3 V p-p		
Bias Voltage	Vcc	V (Vdc)	I (mA Max.)
	Vcc 1 (Digital)	+5	15
	Vcc 2 (Vtune)	+5	10
	Vcc 3 (VCO)	+5	40
Lock Detect Indicator	CMOS 5 V		
Output Power	4 dBm (Min.)		
Spurious Suppression	-75 dB (Typ.)		
Harmonic Suppression	10 dB (Typ.)		
Power Up Time	90 mSec (Typ.) ¹		
Output Impedance	50 Ohms (Nom.)		
Typical Phase Noise	Offset	Phase Noise	
	@ 10 kHz	-100 dBc/Hz	
	@ 100 kHz	-120 dBc/Hz	
Operating Temperature Range	-40 to +85 °C		

¹ From stable power on to stable lock detect.

Binary Frequency Selection Table

D3*	D2*	D1*	D0*	Freq. (MHz)
0	0	0	0	360
0	0	0	1	--
0	0	1	0	--
0	0	1	1	--
0	1	0	0	--
0	1	0	1	--
0	1	1	0	--
0	1	1	1	400
1	0	0	0	--
1	0	0	1	--
1	0	1	0	--
1	0	1	1	--
1	1	0	0	--
1	1	0	1	--
1	1	1	0	--
1	1	1	1	440

-- Reserved for future use.

* Voltage levels: 0V or gnd. / +5V or open.

Absolute Maximum Ratings


Storage Temp. Range	-55 to +125 °C
Bias Voltage (Digital)	+5.25 V
Bias Voltage (Tune)	+5.5 V
Bias Voltage (VCO)	+5.5 V
DC Voltage Applied to RF Out	± 25 V

SELECTABLE FREQUENCY SYNTHESIZER

SURFACE MOUNT MODEL: FCPL3644-26

360 - 440 MHz

PERFORMANCE PLOTS

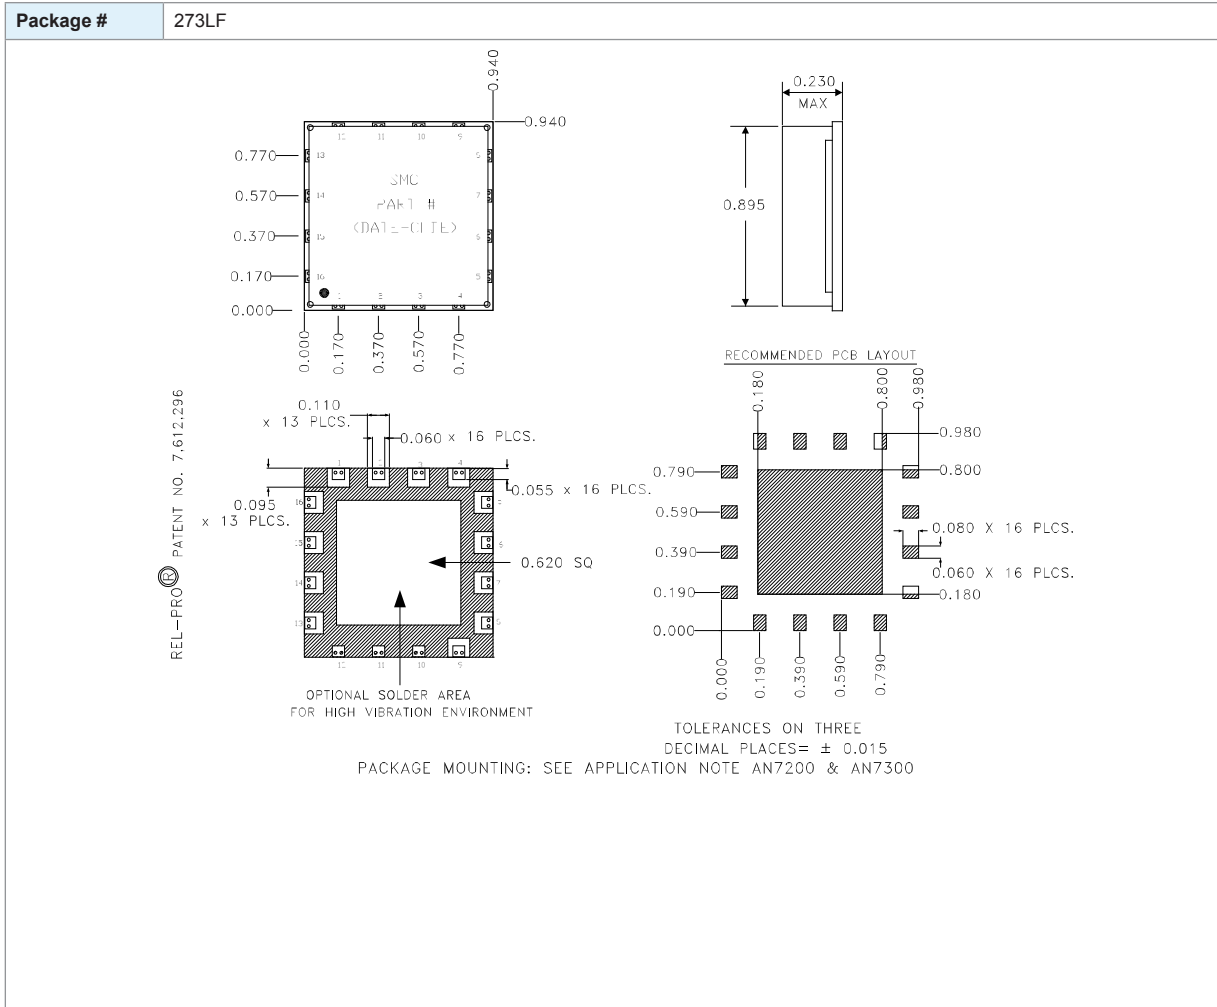

Port Configuration

Pin 1 - NC	Pin 5 - D3	Pin 9 - VCC3 (VCO)	Pin 13 - RF Out
Pin 2 - D0	Pin 6 - Ref. Input	Pin 10 - Ground	Pin 14 - Lock Detect *
Pin 3 - D1	Pin 7 - VCC1 (Digital)	Pin 11 - Ground	Pin 15 - NC
Pin 4 - D2	Pin 8 - VCC2 (Vtune)	Pin 12 - Ground	Pin 16 - NC


* High when locked (source/sink 500 uA)

SELECTABLE FREQUENCY SYNTHESIZER SURFACE MOUNT MODEL: FCPL3644-26


360 - 440 MHz

PERFORMANCE PLOTS

HARMONIC SUPPRESSION

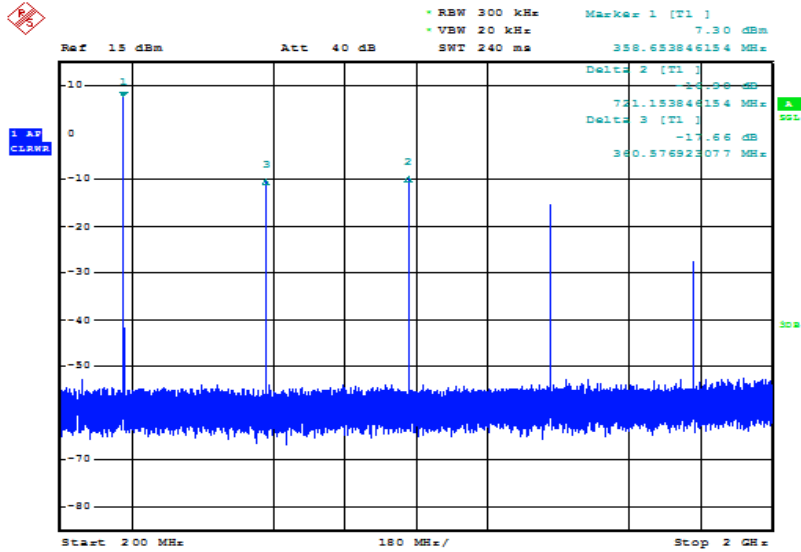


REFERENCE SIDEBAND SUPPRESSION

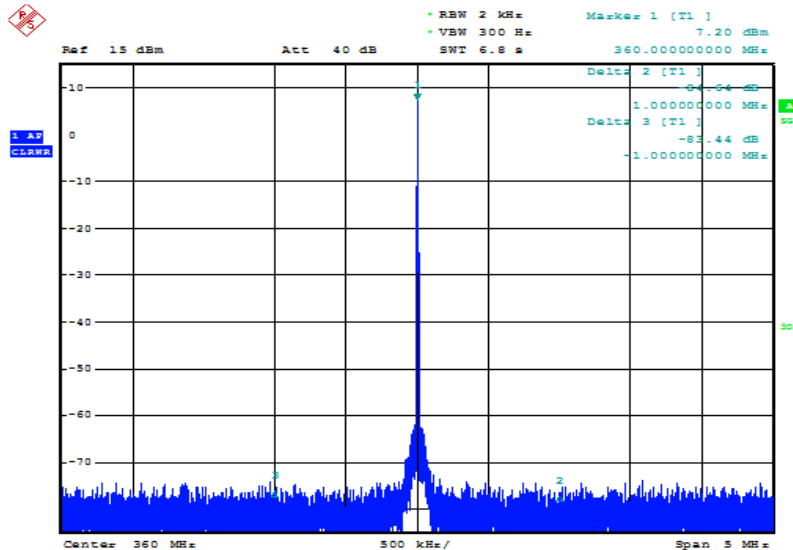

SELECTABLE FREQUENCY SYNTHESIZER SURFACE MOUNT MODEL: FCPL3644-26

360 - 440 MHz

CLOSE IN SPURIOUS SUPPRESSION

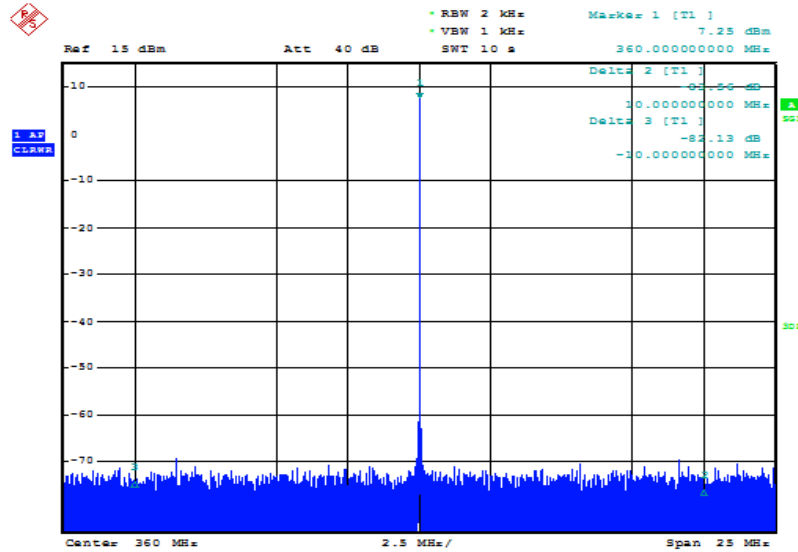


PERFORMANCE PLOTS

SELECTABLE FREQUENCY SYNTHESIZER SURFACE MOUNT MODEL: FCPL3644-26


360 - 440 MHz

PERFORMANCE PLOTS

HARMONIC SUPPRESSION

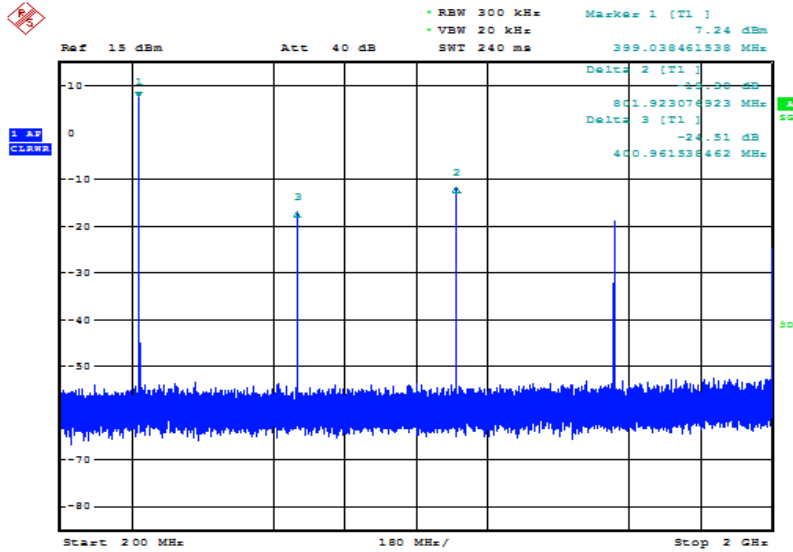


REFERENCE SIDEBAND SUPPRESSION

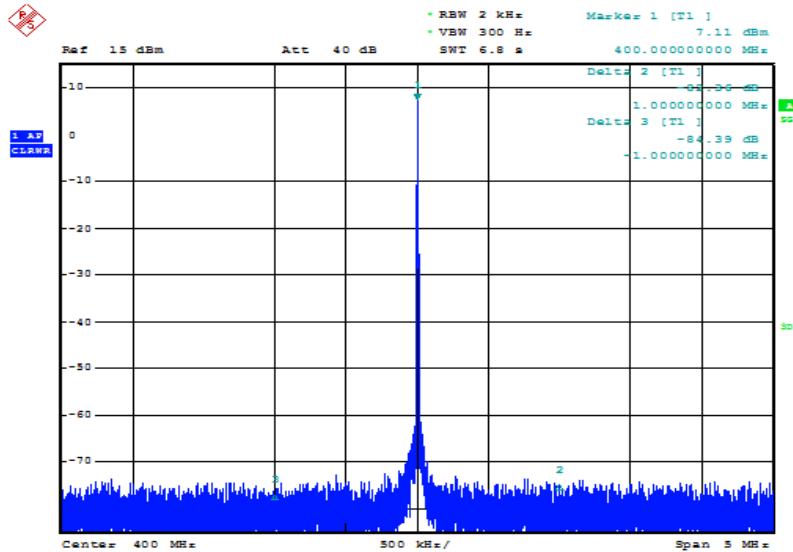

SELECTABLE FREQUENCY SYNTHESIZER SURFACE MOUNT MODEL: FCPL3644-26

360 - 440 MHz

CLOSE IN SPURIOUS SUPPRESSION

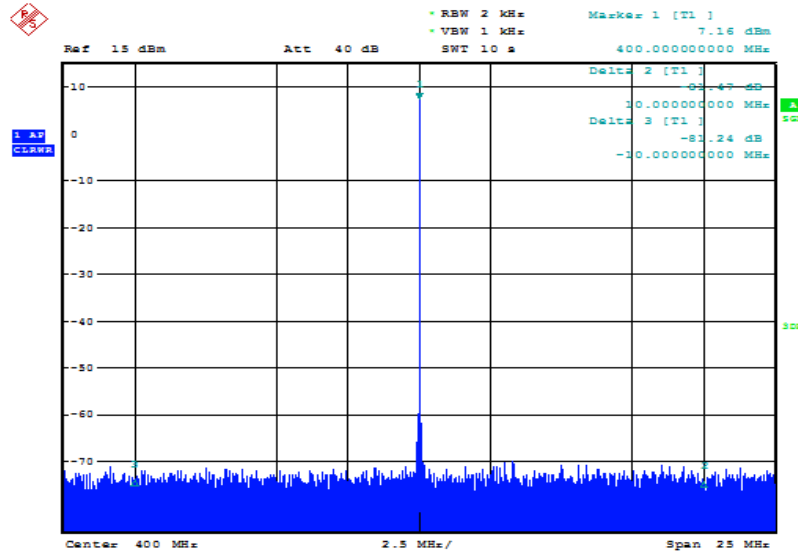


PERFORMANCE PLOTS

SELECTABLE FREQUENCY SYNTHESIZER SURFACE MOUNT MODEL: FCPL3644-26


360 - 440 MHz

PERFORMANCE PLOTS

HARMONIC SUPPRESSION

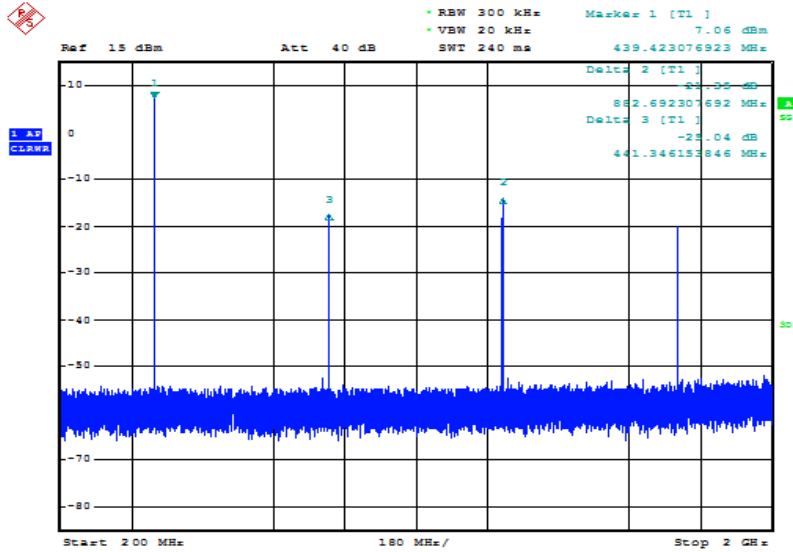


REFERENCE SIDEBAND SUPPRESSION

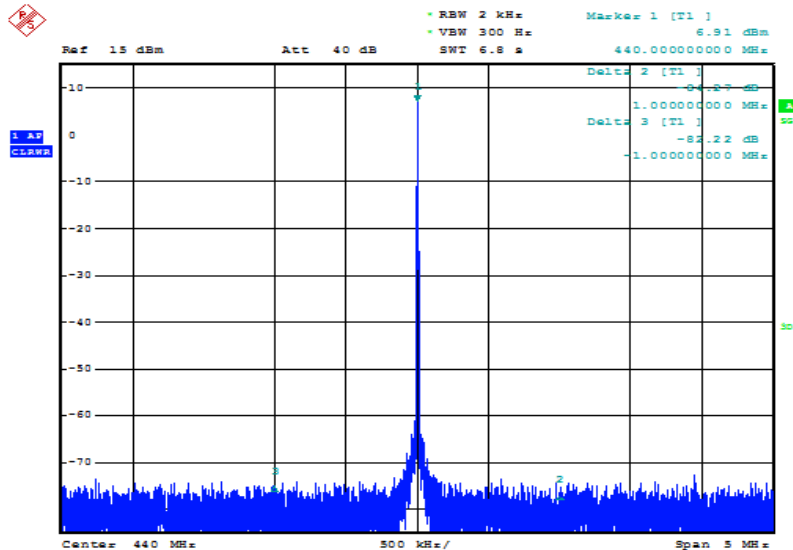

SELECTABLE FREQUENCY SYNTHESIZER SURFACE MOUNT MODEL: FCPL3644-26

360 - 440 MHz

CLOSE IN SPURIOUS SUPPRESSION

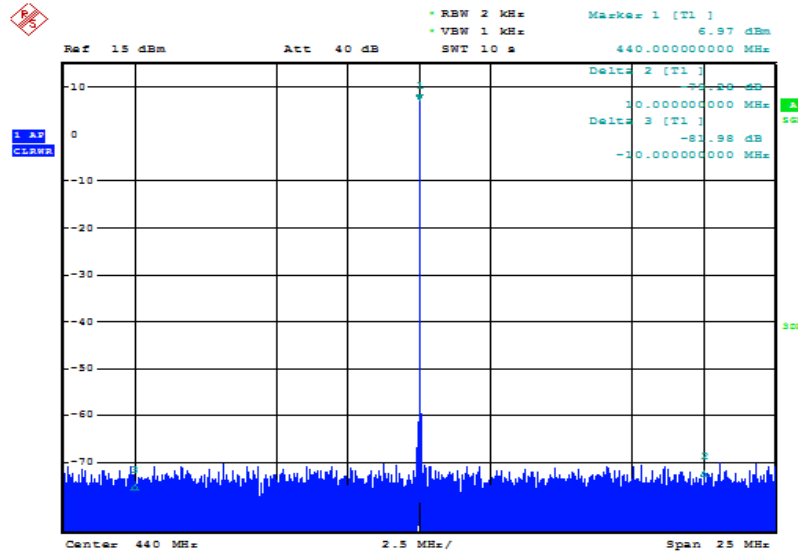

PERFORMANCE PLOTS